


TIMBER 2024

Product information



OUR LARGE FORMATS!

best wood **CLT WALL XL | CEILING XL**



Further information from page 30



Sales



Vivienne Ramsaier
Phone +49 (0)7355 9320-245
Fax +49 (0)7355 9320-300
E-Mail vivienne.ramsaier@schneider-holz.com

Technical support ceiling systems



Niclas Gröber
CAD planning and technical advice
Phone +49 (0)7355 9320-983
E-Mail niclas.groeber@schneider-holz.com

Technical engineers support



Manuel Stuhlinger
B. Eng. woodwork and wood systems
Phone +49 (0)7355 9320-209
E-Mail manuel.stuhlinger@schneider-holz.com



Julian Abfalg
CAD planning and technical advice
Phone +49 (0)7355 9320-976
E-Mail julian.assfalg@schneider-holz.com



Robin Fürst-Schwerdt
CAD planning and technical advice
Phone +49 (0)7355 9320-984
E-Mail robin.fuerst-schwerdt@schneider-holz.com

Engineering office



Jonas Steigmiller
interior fittings / soundproofing department
Phone +49 (0)7355 9320-291
E-Mail jonas.steigmiller@schneider-holz.com

TABLE OF CONTENTS

best wood CLT BOX – CEILING FS.....	4
best wood STATICS	5
best wood COMPONENT CATALOGUE	5
GLUED WOOD PRODUCTS	6
best wood GLULAM, spruce.....	6
best wood GLULAM RIBBED BEAMS.....	8
best wood GLULAM DUO/TRIO RIBBED BEAMS	9
best wood DUO TRIO BEAMS/LAMINATED BEAMS, spruce	10
best wood GLULAM, mountain larch	11
best wood DUO TRIO BEAMS, mountain larch.....	11
best wood PLANKS FOR LOG HOUSES	12
best wood CEILING PLANKS	13
best wood KVH® SOLID STRUCTURAL TIMBER	14
STOCKED GOODS	15
CEILING / ROOF SYSTEMS	16
best wood GLULAM – CEILING.....	16
best wood CLT – CEILING	20
best wood CLT BOX – CEILING FS.....	22
best wood CLT BOX	24
best wood CLT BOX – CEILING OPEN	26
best wood CLT BOX – ROOF	28
CEILING / WALL SYSTEMS large format	30
best wood CLT – CEILING XL	30
best wood CLT – WALL XL	32
ACCESSORIES	35
Lifting systems	35
Fasteners	36
Soundproofing	36
Fireproofing	38
Vapor barrier and airtight sealing membrane	39
Lighting systems.....	40
Finishing and protection from the factory	43
Accessories for ceiling finishing.....	44
Colours for processing at home	45
APPLICATION	46
Installation variants.....	46
Surface qualities/sorting criteria	49
Dimensioning aid ceiling systems	51

Our **wood fiber insulation boards** can be found in our INSULATION 2024 Product information.



Subject to technical modification. Errors excepted.

best wood **CLT BOX – CEILING FS**

NOBLE DESIGN

WITH TESTED PROPERTIES

- **Additional soundproofing** also in the low-frequency range
- Fire protection up to **F90/REI90**
- **Large spans** are possible



best wood STATICS

We have developed the statics software best wood STATICS support you in your planning phase. Using best wood STATICS, designs with best wood Glulam, CLT and the best wood CLT BOX can be dimensioned simply, safely and quickly. Now even faster and uncomplicated with our brand new web version, without any program installation. Just do it!

- Measurement in the GZT and the GZG in accordance with Eurocode 5 with NA DE, NA FR or SIA 265
- Single to four span beams each with and without cantilever possible on the left and/or right end
- Entry of additional permanent and variable area loads possible
- Vibration verification in accordance with the EC 5 procedure or in accordance with Hamm/Richter
- Fire protection verification acc to DIN EN 1995-1-2 with NA DE, NA FR or SIA 265
- Calculation results are issued in the form of checkable static calculations.

Free of charge
as Web application at
statics.schneider-holz.com



Manuel Stuhlinger
B.Eng. Woodwork and wood systems
Technical advice best wood STATICS
Phone +49 (0)7355 9320-209
E-mail manuel.stuhlinger@schneider-holz.com

best wood STATICS



Project name | Item

Preview | **Static system**

Utilisation factor	GLULAM — CEILING	CLT — CEILING	CLT BOX
Cross-sectional height	-	-	-
Load-bearing capacity			
Bending	-	-	-
Shear	-	-	-
Fire protection	-	-	-
Serviceability	-	-	-
Vibration analysis	-	-	-
PDF log			

[Calculate](#)

- Basic settings
- Product type
- Static system**
- Floor construction
- Load
- Vibration analysis
- Ceiling panel

General

Automatic factoring-in of

Dead weight of timber cross-section Additional weight due to floor construction

Additional permanent load: kN/m²

Action category:

Live load across all spans:

Allowance for partition wall:

Span loads

	Load type	G	Q (Kat. A)	Distance	
Span 1	Area load	<input type="text" value="0"/> kN/m²	<input type="text" value="0"/> kN/m²		Add load +
Span 2	Area load	<input type="text" value="0"/> kN/m²	<input type="text" value="0"/> kN/m²		Add load +
Cantilever right	Area load	<input type="text" value="0"/> kN/m²	<input type="text" value="0"/> kN/m²		Add load +

best wood **GLULAM**



Thickness [mm]	Width [mm]									
	100	120	140	160	180	200	220	240	260	280
120	Yellow	Green	Grey	Grey	Grey	Grey	Grey	Grey	Grey	Grey
160	Yellow	Green	Green	Green	Grey	Grey	Grey	Grey	Grey	Grey
200	Yellow	Green	Green	Green	Green	Grey	Grey	Grey	Grey	Grey
240	Yellow	Green	Green	Green	Green	Green	Green	Green	Grey	Grey
280	Yellow	Green	Green	Green	Green	Green	Green	Green	Yellow	Yellow
320	Yellow	Green	Green	Green	Green	Green	Green	Green	Yellow	Yellow
360	Yellow	Green	Green	Green	Green	Green	Green	Green	Yellow	Yellow
up to	Yellow	Green	Green	Green	Green	Green	Green	Green	Yellow	Yellow
1000	Yellow	Green	Green	Green	Green	Green	Green	Green	Yellow	Yellow

Wood species	Quality	Strength		
Local spruce	Industrial quality	GL 24h	Green	Yellow
Local spruce	Visual quality	GL 24h	Green	Yellow
Scandinavian spruce (max. width 240 mm)	Visual quality	GL 24h	Green	Yellow
Local spruce	Industrial quality	GL 28h	Green	Yellow
Local spruce (max. width 240 mm)	Visual quality	GL 28h	Green	Yellow
Scandinavian spruce (max. width 240 mm)	Visual quality	GL 28h	Green	Yellow
Local spruce (max. width 240 mm)	Industrial quality	GL 30h	Green	Yellow
Local spruce (max. width 240 mm)	Visual quality	GL 30h	Green	Yellow
Scandinavian spruce (max. width 240 mm)	Visual quality	GL 30h	Green	Yellow

Prices for quantities exceeding 5 m³ – by request.

Delivery options

Length	2.30–18.00 m
Width	100–280 mm
Other dimensions	Available by request, production dimensions made on a base of 40 mm
Composite timber structures	Composite timber structures made of glued laminated timber with rectangular dimension, block gluing; max. length 7,50 m; max. thickness 900 mm; max. width 1200 mm; max. 2.5 t – available by request

Characteristics

Standard	EN 14080:2013
Strength class	GL 24h, GL 28h, GL 30h
Application classes	Use in application classes 1 and 2 according to EN 1995-1-1
Drying	Kiln dried, wood moisture max. 15 % at delivery
Bonding	Clear, water-proof gluing with polyurethane adhesives (free of formaldehyde)
General information	Planed on four sides, chamfered 4 mm (measured diagonally), trimmed precisely ± 1 mm

Upon demand

Immersion impregnation class 2 up to 14.00 m
--

Certificates (Download at www.schneider-holz.com)



best wood **GLULAM SEPARATED**



GLUED WOOD PRODUCTS

Thickness [mm]	Width [mm]		
	50	60	80
120	Yellow	Green	Green
160	Yellow	Green	Green
200	Yellow	Green	Green
240	Yellow	Green	Green
280	Yellow	Green	Green
320	Yellow	Green	Green
360	Yellow	Green	Green
400	Yellow	Green	Green
440	Grey	Green	Green
480	Grey	Green	Green
520	Grey	Green	Green
560	Grey	Green	Green
600	Grey	Green	Green
640	Grey	Green	Green

Remarks

The separated side is not usable for visible parts because of shrinkage cracks.

Wood species

Quality

Strength

Local spruce	Industrial quality	GL 24hs	Green	Yellow
Local spruce	Visual quality	GL 24hs	Green	Yellow
Scandinavian spruce	Visual quality	GL 24hs	Green	Yellow

Prices for quantities exceeding 5 m³ – by request.

Delivery options

Length	2.30–18.00 m
Width	50–80 mm
Other dimensions	Available by request, production dimensions made on a base of 40 mm
Minimum production length	per width 5.00 m
Minimum order quantity	to be ordered in pairs, due to separation

Characteristics

Standard	EN 14080:2013
Strength class	GL 24hs
Application classes	Use in application classes 1 and 2 according to EN 1995-1-1
Drying	Kiln dried, wood moisture max. 15% at delivery
Bonding	Clear, water-proof gluing with polyurethane adhesives (free of formaldehyde)
General information	Planed on four sides, chamfered 4 mm (measured diagonally), trimmed precisely ± 1 mm

Upon demand

Immersion impregnation class 2 up to 14.00 m
--

Certificates (Download at www.schneider-holz.com)



best wood **GLULAM RIBBED BEAMS**



Thickness [mm]	Width [mm]						
	40	45	50	60	70	80	100
120	Yellow	Yellow	Yellow	Green	Green	Green	Green
160	Yellow	Yellow	Yellow	Green	Green	Green	Green
200	Yellow	Yellow	Yellow	Green	Green	Green	Green
240	Yellow	Yellow	Yellow	Green	Green	Green	Green
280	Yellow	Yellow	Yellow	Green	Green	Green	Green
320	Yellow	Yellow	Yellow	Green	Green	Green	Green
360	Grey	Yellow	Yellow	Green	Green	Green	Green
400	Grey	Grey	Yellow	Green	Green	Green	Green

Wood species Quality Purch. in pack. (exceed. 2 m³ / one dimension / one length)

Local spruce	Industrial quality	Width 60–100 mm	Green
Local spruce	Industrial quality	Width 50 mm	Yellow
Local spruce	Industrial quality	Width 45 mm	Yellow
Local spruce	Industrial quality	Width 40 mm	Yellow

Delivery options

Length	2.30–18.00 m
Width	40–100 mm; to be ordered in pairs
Other dimensions	Available by request; production dimensions made on a base of 40 mm

Characteristics

Standard	EN 14080:2013
Strength class	GL 24hs
Application classes	Use in application classes 1 and 2 according to EN 1995-1-1
Drying	Kiln dried, wood moisture max. 15 % at delivery
Bonding	Clear, water-proof gluing with polyurethane adhesives (free of formaldehyde)
General information	Planed on four sides (levelled), chamfered 4 mm (measured diagonally), trimmed precisely ± 1 mm

Upon demand

Immersion impregnation class 2 up to 14.00 m
--

Certificates (Download at www.schneider-holz.com)



best wood **DUO/TRIO RIBBED BEAMS**



GLUED WOOD PRODUCTS

Thickness [mm]	Width [mm]			
	60 DUO	80 DUO	100 DUO	120 TRIO
80	65*			
100	55	44		
120	45	36		27
140	40	32	24	24
160	35	28	21	21
180	30	24	18	18
200	25	20	15	15
220	25	20	15	15
240	20	16	12	12
260	20	16		12
280	20	16		12

* units per package (13.00 m)

Wood species Quality

Local spruce	Industrial quality	Purch. in pack. (exceed. 3 m³)	One dimension – one length	■	■
Local spruce	Industrial quality	Lengths as per list	from 1 m ³ / one dimension	■	■
Local spruce	Industrial quality	Single pieces	13.00 m / 6.50 m	■	■

Delivery options

Length	2.30–18.00 m
Width	60–120 mm
Other dimensions	Available by request

Characteristics

Standard	EN 14080:2013
Strength class	Widths 80 and 120 mm: GL 24h; widths 60 and 100 mm: C24
Application classes	Use in application classes 1 and 2 according to EN 1995-1-1
Drying	Kiln dried, wood moisture max. 15 % at delivery
Bonding	Clear, water-proof gluing with polyurethane adhesives (free of formaldehyde)
General information	Planed on four sides, chamfered 4 mm (measured diagonally), trimmed precisely ± 1 mm

Upon demand

Immersion impregnation class 2 up to 14.00 m
--

Certificates (Download at www.schneider-holz.com)



best wood **DUO/TRIO BEAMS/** **LAMINATED BEAMS**



Thickness [mm]	Width [mm]							
	80 DUO	100 DUO	120 DUO/TRIO	140 DUO	150 TRIO	160 QUATTRO	180 TRIO	200 QUATTRO
100	GLULAM							
120	GLULAM		TRIO GLULAM					
140	GLULAM	C24	TRIO GLULAM		C24			
160	GLULAM	C24	TRIO GLULAM		C24	GLULAM		
180	GLULAM	C24	DUO C24		C24	GLULAM	C24	
200	GLULAM	C24	DUO C24	C24	C24	GLULAM	C24	C24
220	GLULAM		TRIO GLULAM			GLULAM		
240	GLULAM	C24	TRIO GLULAM		C24	GLULAM		C24
260	GLULAM		TRIO GLULAM			GLULAM		
280	GLULAM		TRIO GLULAM			GLULAM		

Wood species

Quality

Scandinavian spruce	Visual quality	Purch. in pack. (exceed. 3 m³)	One dimension – one length	■
Scandinavian spruce	Visual quality	Lengths as per list	from 1 m ³ / one dimension	■
Scandinavian spruce	Visual quality	Single pieces	13.00 m / 6.50 m	■

Wood species

Local spruce	Visual quality	Purch. in pack. (exceed. 3 m³)	One dimension – one length	■
Local spruce	Visual quality	Lengths as per list	from 1 m ³ / one dimension	■
Local spruce	Visual quality	Single pieces	13.00 m / 6.50 m	■

Delivery options

Length	2.30–16.00 m; widths 80, 120 and 160 mm in 2.30–18.00 m
Width	80–200 mm
Other dimensions	Available by request

Characteristics

Standard	EN 14080:2013
Strength class	GL 24h, C24
Application classes	Use in application classes 1 and 2 according to EN 1995-1-1
Drying	Kiln dried, wood moisture max. 15 % at delivery
Bonding	Clear, water-proof gluing with polyurethane adhesives (free of formaldehyde)
General information	Planed on four sides, chamfered 4 mm (measured diagonally), trimmed precisely ± 1 mm

Upon demand

Immersion impregnation class 2 up to 14.00 m
--

Certificates (Download at www.schneider-holz.com)



best wood BSH

Mountain larch



Thickness [mm]	Width [mm]					
	100	120	140	160	180	200
120	Yellow	Green	Light Green	Light Green	Light Green	Light Green
160	Yellow	Green	Light Green	Light Green	Light Green	Light Green
200	Yellow	Green	Light Green	Light Green	Light Green	Light Green
240	Yellow	Green	Light Green	Light Green	Light Green	Light Green
280	Yellow	Green	Light Green	Light Green	Light Green	Light Green
320	Yellow	Green	Light Green	Light Green	Light Green	Light Green
360	Yellow	Green	Light Green	Light Green	Light Green	Light Green
up to	Yellow	Green	Light Green	Light Green	Light Green	Light Green
1000	Yellow	Green	Light Green	Light Green	Light Green	Light Green

GLUED WOOD PRODUCTS

best wood DUO/TRIO BEAMS

mountain larch

Thickness [mm]	Width [mm]	
	80 (Duo)	120 (Trio)
100	Yellow	Light Green
120	Green	Light Green
140	Green	Light Green
160	Green	Light Green

Wood species	Quality	Strength
Mountain larch (greenware with barely any splints, no furniture quality)	Larch	GL 24h ■ ■

Prices for quantities exceeding 5 m³ – by request.

Delivery options

Length	2.30–16.00 m
Width	GLULAM: 100–200 mm; DUO/TRIO: 80/120 mm
Other dimensions	Available by request, production dimensions made on a base of 40 mm

Characteristics

Standard	EN 14080:2013
Strength class	GL 24h
Application classes	Use in application classes 1 and 2 according to EN 1995-1-1
Drying	Kiln dried, wood moisture max. 15 % at delivery
Bonding	Clear, water-proof gluing with polyurethane adhesives (free of formaldehyde)
General information	Planed on four sides, chamfered 4 mm (measured diagonally), trimmed precisely ± 1 mm

Certificates (Download at www.schneider-holz.com)



best wood **PLANKS FOR LOG HOUSES**



Local spruce

Wall thickness								
60	80	100	120	140	160	180	200	240
2 x 30	2 x 40	2 x 50	3 x 40	5 x 40*	4 x 40	5 x 40*	5 x 40	6 x 40
GL 24h	GL 24h	C24	GL 24h	GL 24h	GL 24h	GL 24h	GL 24h	GL 24h

* horizontally glued lamellae = profile size 200 mm


Scandinavian spruce

Wall thickness							
80	100	120	140	160	180	200	240
2 x 40	2 x 50	2 x 60	2 x 70	4 x 40	3 x 60	5 x 40	6 x 40
GL 24h	C24	C24	C24	GL 24h	C24	GL 24h	GL 24h

Wood species

Wood species	Quality	Strength
Local spruce	Industrial quality	GL 24h, C24 ■
Scandinavian spruce	Visual quality	GL 24h, C24 ■

Installation variants

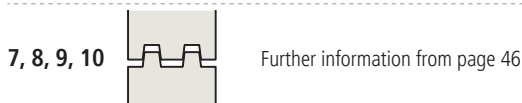

Delivery options

Length	2.30–16.00 m
Wall thickness	60–240 mm
Profile/height	Profile size 200 mm = production dimensions, profile depth 10 mm Cover size 190 mm Exceeding a wall thickness of 160 mm with triple tongue and groove
Other dimensions	Available by request
Minimum order quantity	5 m³ / one dimension
Other wood species	Mountain larch – available by request

Characteristics

Standard	EN 14080:2013
Strength class	GL 24h, C24
Application class	Use in application classes 1 and 2 according to EN 1995-1-1
Drying	Kiln dried, wood moisture max. 15 % at delivery
Bonding	Clear, water-proof gluing with polyurethane adhesives (free of formaldehyde)
Lamellae	Vertically glued
General information	Planed on four sides, chamfered 4 mm (measured diagonally), trimmed precisely ± 1 mm; no joinery possible

Upon demand

Immersion impregnation class 2 up to 14.00 m

Certificates (Download at www.schneider-holz.com)



best wood CEILING PLANKS



Local spruce

Ceiling thickness								
60	80	100	120	140	160	180	200	240
2 x 30	2 x 40	2 x 50	3 x 40	5 x 40*	4 x 40	5 x 40*	5 x 40	6 x 40
GL 24h	GL 24h	C24	GL 24h	GL 24h	GL 24h	GL 24h	GL 24h	GL 24h

* vertically glued lamellae = profile size 200 mm

Scandinavian spruce

Ceiling thickness							
80	100	120	140	160	180	200	240
2 x 40	2 x 50	2 x 60	2 x 70	4 x 40	3 x 60	5 x 40	6 x 40
GL 24h	C24	C24	C24	GL 24h	C24	GL 24h	GL 24h

Wood species

Wood species	Quality	Strength
Local spruce	Industrial quality	GL 24h, C24
Scandinavian spruce	Visual quality	GL 24h, C24

Installation variants

7, 8, 9, 10		Further information from page 46
-------------	--	----------------------------------

Delivery options

Length	2.30–16.00 m
Ceiling thickness	60–240 mm
Profile/width	Profile size 200 mm = production dimensions, profile depth 10 mm cover size 190 mm from ceiling thickness of 160 mm with triple tongue and groove
Other dimensions	Available by request
Minimum order quantity	5 m³ / one dimension

Characteristics

Standard	EN 14080:2013
Strength class	GL 24h, C24
Application class	Use in application classes 1 and 2 according to EN 1995-1-1
Drying	Kiln dried, wood moisture max. 15 % at delivery
Bonding	Clear, water-proof gluing with polyurethane adhesives (free of formaldehyde)
Lamellae	Horizontally glued
General information	Planed on four sides, chamfered 4 mm (measured diagonally), trimmed precisely ± 1 mm; no joinery possible

Upon demand

Immersion impregnation class 2 up to 14.00 m
--

Certificates (Download at www.schneider-holz.com)



best wood KVH® SOLID STRUCTURAL TIMBER



		Thickness [mm]								
		Finger-jointed								
		45	50	60	80	100	120	140	160	
Width [mm]	60			90						
	80			65	Dougl.	52				
	100	77*	66	55	Dougl.	44	33			
	120	63		45	Dougl.	36	27	27		
	140			40	Dougl.	32	24	24	24	
	145	56								
	160		42	35	Dougl.	28	21	21	21	14 (DUO NSI)
	180			30	Dougl.	24	18	18	18	12 (DUO NSI)
	200	35	30	25	Dougl.	20	15	15	15	10 (DUO NSI)
	220	35		25	Dougl.	20	15	15	15	10 (DUO NSI)
240			20	Dougl.	16	12	12	12	8 (DUO NSI)	
260			20		16	12	12	12	8 (DUO NSI)	
280			20		16	12	12	12	8 (DUO NSI)	


* units per 13 m package KVH®

Wood species	Quality	Delivery options		
Loc. spruce	Industrial quality	Purch. in pack.	Length 5.00–14.00 m	 
Loc. spruce	Industrial quality	Single pieces	13.00 m (entire beams), 6.50 m (half beams)	 
Loc. spruce	Industrial quality	KVH® as per list	Length 5.00–14.00 m lengths under 5.00 m are available in multiple lengths	 
Loc. spruce	Industrial quality	Fixed size ± 2 mm	Length 2.30–5.00 m; min. 40 pieces / one dimension – one length Length 5.00–14.00 m – single pieces possible	 
Douglas fir	Industrial quality	KVH single pieces	Length 13.00 m Other dimensions Available by request	 by request

		Thickness [mm]		
		Not finger-jointed		
		60	80	
Width [mm]	60	108*		
	80	84	91	
	100	99	77	
	120	81	63	Scantling
	140	72	56	Scantling
	160	63	49	Scantling

* units per package KVH®

Wood species	Quality	Delivery options	
Loc. spruce	Ind. quality	Purch. in pack.	Length 5.00 m 
Loc. spruce	Ind. quality	Single pieces	Length 5.00 m 
Loc. spruce	Ind. quality	Scantling made from KVH separated into 30/50 mm	

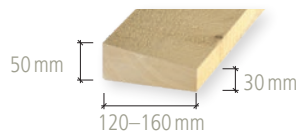

Characteristics

Standard	EN 15497:2014
Strength class	C24
Application classes	Use in application classes 1 and 2 according to EN 1995-1-1
Drying	Kiln dried, wood moisture max. 18 % at delivery
General information	Finger-jointed, planed on four sides (levelled), chamfered 4 mm (measured diagonally)

Sorting criteria see page 50

Certificates (Download at www.schneider-holz.com)



STOCKED ITEMS

Spruce, fir

FRAME: ON SPAR LATHS, rough sawn, not dried

Dimension	Length	Package size
45 x 50 mm	5.00 m	220 pieces

Special dimensions available by request.

FLOORBOARDS: rough sawn, dried

Dimension	Length	Package size
45 x 250 mm	5.00 m	44 pieces

LATHS: rough sawn, dried, not sorted according to density

Dimension	Length	Package size
24/48 mm	4.00 - 5.00 m	36 bundles of 10 pieces
30/48 mm	4.00 - 5.00 m	28 bundles of 10 pieces

ROOF LATHS-S10: rough sawn, dried

Roof laths sorted according to density, sorting class S10 with CE mark.

Dimension	Length	Package size
30 x 50 mm	5.00 m	330 pieces/pack

FORMWORK GRADE II-III: rough sawn, dried, not sorted according to density

Dimension	Length	Width (sorted according to width)	Package size
23 mm	5.00 m	145 mm	192 pieces
33 mm	5.00 m	107-247 mm in 20 mm intervals	18 layers

SUBSTRUCTURE LATHS: levelled on 4 sides, dried

Dimension	Length		Package size
27 x 75 mm	4.00 m	without chamfer	420 pieces
40 x 80 mm	4.00 m	without chamfer	260 pieces

NEW!
Length 4.00 m

SUBSTRUCTURE LATHS: levelled on 4 sides, dried

Dimension	Length		Package size
21 x 45 mm	5.00 m	without chamfer	400 pieces
21 x 75 mm	5.00 m	without chamfer	240 pieces
27 x 45 mm	5.00 m	without chamfer	325 pieces
27 x 75 mm	5.00 m	without chamfer	195 pieces
27 x 120 mm	5.00 m	without chamfer	117 pieces
30 x 60 mm	5.00 m	without chamfer	180 pieces
30 x 80 mm	5.00 m	without chamfer	140 pieces
30 x 120 mm	5.00 and 13.00 m	without chamfer	90 pieces
30 x 160 mm	5.00 and 13.00 m	without chamfer	70 pieces
40 x 60 mm	5.00 m	with chamfer	162 pieces
40 x 80 mm	5.00 and 13.00 m	with chamfer	182 pieces
50 x 60 mm	5.00 and 13.00 m	with chamfer	198 pieces

LATHS WITH FINGER JOINTS: planed on 3 sides, cut with fine buzz saw on one side, dried, gluing D4 according to EN 204

Dimension	Length		Package size
25 x 60 mm	5.00 m	without chamfer	360 pieces/pack
30 x 60 mm	5.00 m	without chamfer	288 pieces/pack
40 x 60 mm	5.00 m	without chamfer	216 pieces/pack
60 x 60 mm	5.00 m	without chamfer	144 pieces/pack

Surcharge for smaller units – lump sum




best wood **GLULAM – CEILING**

Glued laminated timber for solid ceiling structures


	Spruce industrial quality (planed)	Spruce visual quality (planed)	
	local, GL 24h	local, GL 24h	Scandinavian, GL 24h
Thickness [mm]			
100	by request	by request	by request
120			
140			
160			
180			
200			
220			
240			
260			
280			

Wood species	Quality	Strength
Mountain larch (greenware with barely any splints, no furniture quality)	Larch	GL 24h
Local spruce	Industrial quality	GL 28h
Local spruce, max. thickness 200 mm	Visual quality	GL 28h
Scandinavian spruce, max. thickness 200 mm	Visual quality	GL 28h

■ ■ Finishing options (invoiced profile dimensions)

BASIC PACKAGE for lengths of 2.30-16.00 m; surface cosmetics; sanded or rough-sawn look; protective foil <u>not</u> possible		surcharge €/m ²
UV-PROTECT PACKAGE or COLOR PACKAGE for lengths of 2.30-16.00 m; UV-Protect, soft white, alpine white and light grey; further colours by request; with removable protective foil		surcharge €/m ²
AQUA PROTECT PACKAGE Coating on top of the elements for protection from moisture. Joints, penetrations and recesses must be masked off.		surcharge €/m ²
JOINERY Drilling, milling, notches, bevel cuts, countersinking and many more		by request

Installation variants – Invoiced profile dimensions for variant 1 and 4

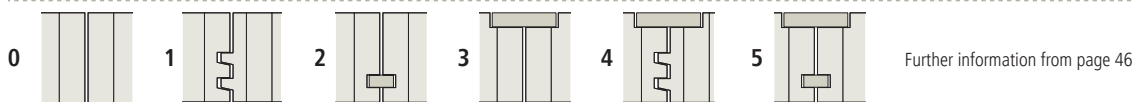

Inlay board for forming the ceiling section: Three-layer board SWP/2 S 3L according to EN 13353:2011, 22/100 mm in 5.00 m/piece

Inlay board for forming the ceiling section: Three-layer board SWP/2 S 3L according to EN 13353:2011, 27/100 mm in 5.00 m/piece

Separate tongue: spruce, 19/38 mm in 3.50 m/piece

Delivery options

Length	2.30–18.00 m
Width	500–1000 mm
Other dimensions	Available by request
Minimum production length	per element width 5.00 m




Characteristics

Standard	EN 14080:2013
Strength class	GL 24h, GL 28h
Application classes	Use in application classes 1 and 2 according to EN 1995-1-1
Drying	Kiln dried, wood moisture max. 15 % at delivery
Bonding	Clear, water-proof gluing with polyurethane adhesives (free of formaldehyde)
Lamellae	40 mm, sorted for quality and finger-jointed
General information	Planed on four sides, bottom side chamfered 4 mm (measured diagonally), upper side without chamfer, trimmed precisely ± 2 mm; visual quality only on the bottom side
Tolerance	Thickness: ± 1 mm; width: ± 2 mm; length: ± 2 mm; curvature at ceiling level: max. 20 mm per 18.00 m
Heat conductivity	$\lambda = 0.13$ (W/m*K) according to EN ISO 10456
Shape change	Shrinkage and swelling dimensions per 1 % change in timber moisture: Length: 0.02 %, width/thickness: 0.24 % (DIN 1052:2008)
Fireproofing	Verification possible via the free best wood STATICS software

Description

The outstanding advantage of the best wood GLULAM CEILING is, that it can be installed simply and rapidly. The elements are immediately accessible after being installed. It provides stability and a pleasant appearance in one. With this organic solution, a very enjoyable room climate can be obtained. Installation, also subsequently, is possible without any problems.

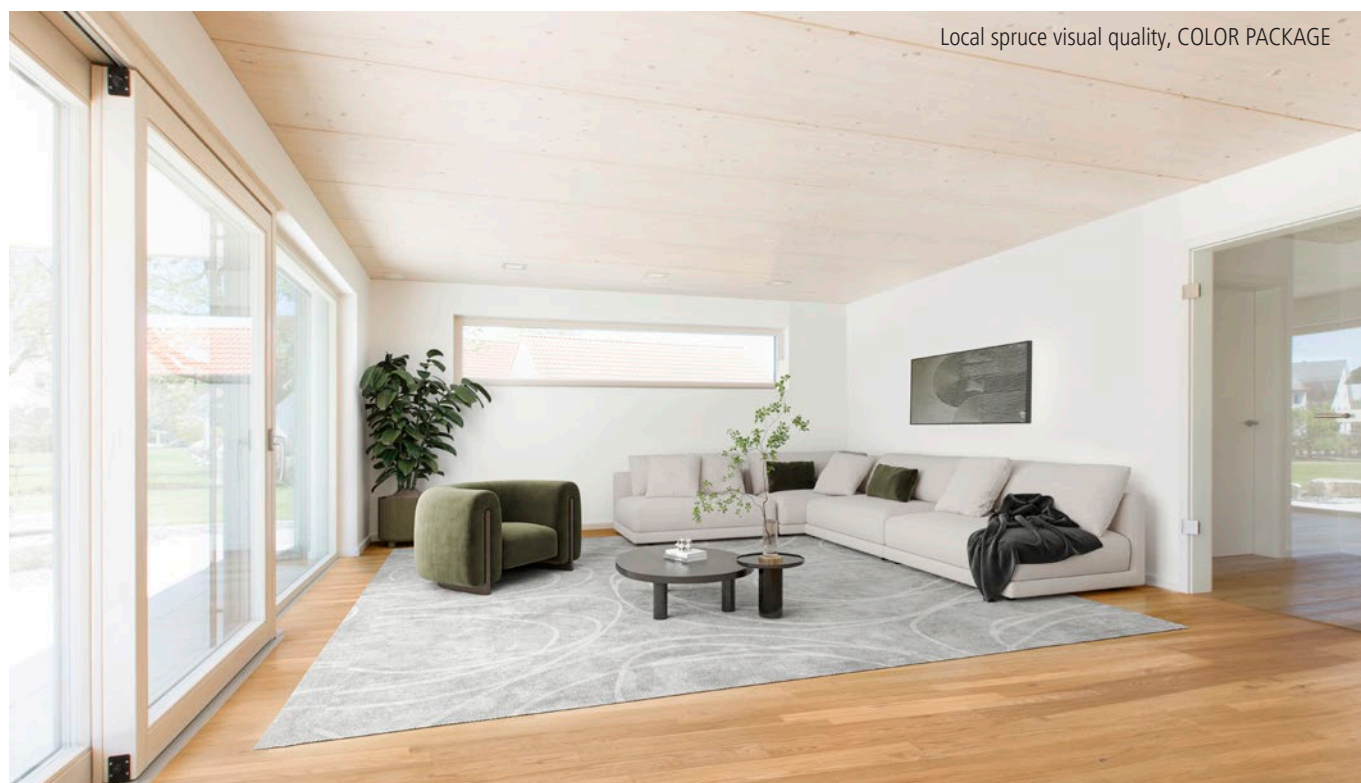

Local spruce visual quality, COLOR PACKAGE

Certificates (Download at www.schneider-holz.com)



Soundproofing



Fireproofing



Statics

Dimensioning tables Ceiling and roof systems

More information
about our services
on page 4/5

from page 51

best wood **GLULAM – CEILING SEPARATED**

Glued laminated timber for smaller, weaker ceiling thicknesses



		Spruce industrial quality (planed)	Spruce visual quality (planed)	
		local, GL 24hs	local, GL 24hs	Scandinavian, GL 24hs
Thickness [mm]	max. Width			
45	360	by request	by request	by request
50	400			
55	440			
60	480			
65	520			
70	560			
75	600			
80	640			
85	680			
90	720			
95	760			

Wood species

Mountain larch (greenware with barely any splints, no furniture quality)

Quality







Larch

Strength

GL 24h

by request

Finishing options (invoiced profile dimensions)

BASIC PACKAGE for lengths of 2.30-16.00 m; surface cosmetics; sanded or rough-sawn look; protective foil <u>not</u> possible			surcharge €/m²	
UV-PROTECT PACKAGE or COLOR PACKAGE for lengths of 2.30-16.00 m; UV-Protect, soft white, alpine white and light grey; further colours by request; with removable protective foil				surcharge €/m²
AQUA PROTECT PACKAGE Coating on top of the elements for protection from moisture. Joints, penetrations and recesses must be masked off.			surcharge €/m²	
JOINERY Drilling, milling, notches, bevel cuts, countersinking and many more	by request			

Installation variants – Invoiced profile dimensions for variant 6, 7 and 8

0  2  3  6, 7, 8  Further information from page 46

Inlay board and separate tongue see page 16

Delivery options

Length	2.30–18.00 m
Width	360–760 mm, (< 500 mm production dimensions based on 40 mm)
Other dimensions	Available by request, production dimensions made on a base of 40 mm
Minimum production length	per element width 5.00 m
Minimum order quantity	to be ordered in pairs, due to separation

Characteristics

Standard	EN 14080:2013
Strength class	GL 24hs
General information/certificates	see best wood GLULAM – CEILING page 17

best wood **GLULAM – CEILING ACOUSTIC DESIGN**

Glued laminated timber for solid ceiling structures with Acoustic design



	Spruce industrial quality (planed)	Spruce visual quality (planed)	
	local, GL 24h	local, GL 24h	Scandinavian, GL 24h
Thickness [mm]			
100	by request	by request	by request
120			
140			
160			
180			
200			
220			
240			
260			
280			

Wood species

	Quality	Strength	
Mountain larch (greenware with barely any splints, no furniture quality)	Larch	GL 24h	by request
Local spruce	Industrial quality	GL 28h	
Local spruce, max. thickness 200 mm	Visual quality	GL 28h	
Scandinavian spruce, max. thickness 200 mm	Visual quality	GL 28h	

Finishing options (invoiced profile dimensions)

BASIC PACKAGE for lengths of 2.30-14.00 m; surface cosmetics; sanded or rough-sawn look; protective foil <u>not</u> possible		surcharge €/m ²
UV-PROTECT PACKAGE or COLOR PACKAGE for lengths of 2.30-16.00 m; UV-Protect, soft white, alpine white and light grey; further colours by request; with removable protective foil		surcharge €/m ²
JOINERY Drilling, milling, notches, bevel cuts, countersinking and many more		by request

Installation variants

0	2	3	5	Further information from page 46	Saw cut GLULAM CEILING ACOUSTIC DESIGN 40	5/11 mm, central in the adhesive joints Possible widths: 200/240/280/320/360/400
---	---	---	---	----------------------------------	--	--

Inlay board and separate tongue see page 16

Delivery options

Length	2.30–14.00 m
Width	200–400 mm depending on the type of saw cut (production dimensions made on a base of 40 mm)
Minimum production length	per element width 5.00 m
Minimum order quantity	5 m ³

Characteristics

Standard	EN 14080:2013
Strength class	GL 24h, GL 28h
General information/certificates	see best wood GLULAM – CEILING page 17

best wood CLT – CEILING

Cross laminated timber for solid ceiling structures










		Spruce industrial quality (planed)					Spruce visual quality (sanded on one side)										
Thick. [mm]	Layers	Layer structure					Local m ²	Layers	Layer structure					Scandinavian m ²	Local KNOT-FREE* m ²		
		L	Q	L	Q	L			L	Q	L	Q	L				
3 layers	60	3		20	20	20	by request	3		20	20	20	by request	by request			
	80	3		30	20	30		3		30	20	30					
	90	3		30	30	30		3		30	30	30					
	100	3		40	20	40		4		20+20	20	40					
	120	3		40	40	40		4		20+20	40	40					
5 layers	140	5	L	Q	L	Q		L	6	L	Q	L			Q	L	by request
	160	5	40	20	20	20		40	6	20+20	20	20			20	40	
	180	5	40	20	40	20		40	6	20+20	20	40			20	40	
	200	5	40	30	40	30		40	6	20+20	30	40			30	40	
	220	5	40	40	40	40		40	6	20+20	40	40			40	40	
	220	7	40+40	20	20	20	40+40	8	20+20+40	20	20	20	40+40				
	240	7	40+40	20	40	20	40+40	8	20+20+40	20	40	20	40+40				
	260	7	40+40	30	40	30	40+40	8	20+20+40	30	40	30	40+40				
280	7	40+40	40	40	40	40+40	8	20+20+40	40	40	40	40+40					

20 = lamella thickness in mm ; L = lengthways layer ; Q = lateral layer


Other wood species

Local silver fir by request

Finishing options (invoiced profile dimensions)

PREMIUM PACKAGE UV-PROTECT PACKAGE + ACOUSTIC DESIGN PACKAGE + AQUA PROTECT PACKAGE	 	– surcharge €/m ²
UV-PROTECT PACKAGE or COLOR PACKAGE surface cosmetics; sanded or rough-sawn look; UV-Protect, soft white, alpine white and light grey; further colours by request; with removable protective foil	    	or surcharge €/m ²
ACOUSTIC DESIGN PACKAGE saw cuts 2/6 mm; distance between saw cuts 50 mm; coverage widths from 900 to 1200 mm at 50 mm intervals available		surcharge €/m ²
AQUA PROTECT PACKAGE Coating on top of the elements for protection from moisture. Joints, penetrations and recesses must be masked off.		surcharge €/m ²
JOINERY Drilling, milling, notches, bevel cuts, countersinking and many more		by request

Installation variants – Invoiced profile dimensions for variant 11, 14 and 16

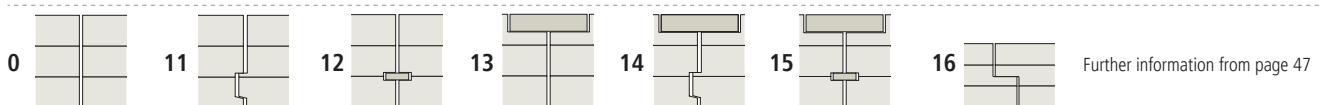

Inlay board for forming the ceiling section: Three-layer board SWP/2 S 3L according to EN 13353:2011, 22/100 mm in 5.00 m/piece

Inlay board for forming the ceiling section: Three-layer board SWP/2 S 3L according to EN 13353:2011, 27/100 mm in 5.00 m/piece

Separate tongue: Multiplex birch, 9/30 mm in 2.50 m/piece, chamfered on one side




Delivery options

Length	2.30–16.00 m
Width	900–1200 mm, shiplap edge ≤ 1150 mm cover size
Minimum production length	per element width 8.00 m
Other dimensions	Available by request

Characteristics

Approval	ETA-21/0568
Strength class	C24
Application classes	Use in application classes 1 and 2 according to EN 1995-1-1
Drying	Kiln dried, wood moisture max. 15 % at delivery
Bonding	Clear, water-proof gluing with polyurethane adhesives (free of formaldehyde)
Lamellae	20, 30 and 40 mm, sorted for quality and finger-jointed
General information	Planed on four sides, bottom side chamfered 4 mm (measured diagonally), trimmed precisely ± 1 mm
Heat conductivity	$\lambda = 0.12$ (W/m*K) according to ETA-21/0568
Specific heat capacity	1600 (J/kg*K) according to EN ISO 10456
CLT panel diffusion resistance	μ 20 (damp) / 50 (dry) in accordance with EN ISO 10456
Emission class	E1 according to DIN EN 717-1
Shape change	At board level ≈ 0.02 % per 1 % change in wood moisture perpendicular to board level ≈ 0.24 % per 1 % change in wood moisture
Reaction to fire	D-s2, d0 according to DIN EN 13501-1
Fireproofing	Verification possible via the free best wood STATICS software
Airtightness	Airtightness after testing in accordance with EN 12114 from 60 mm

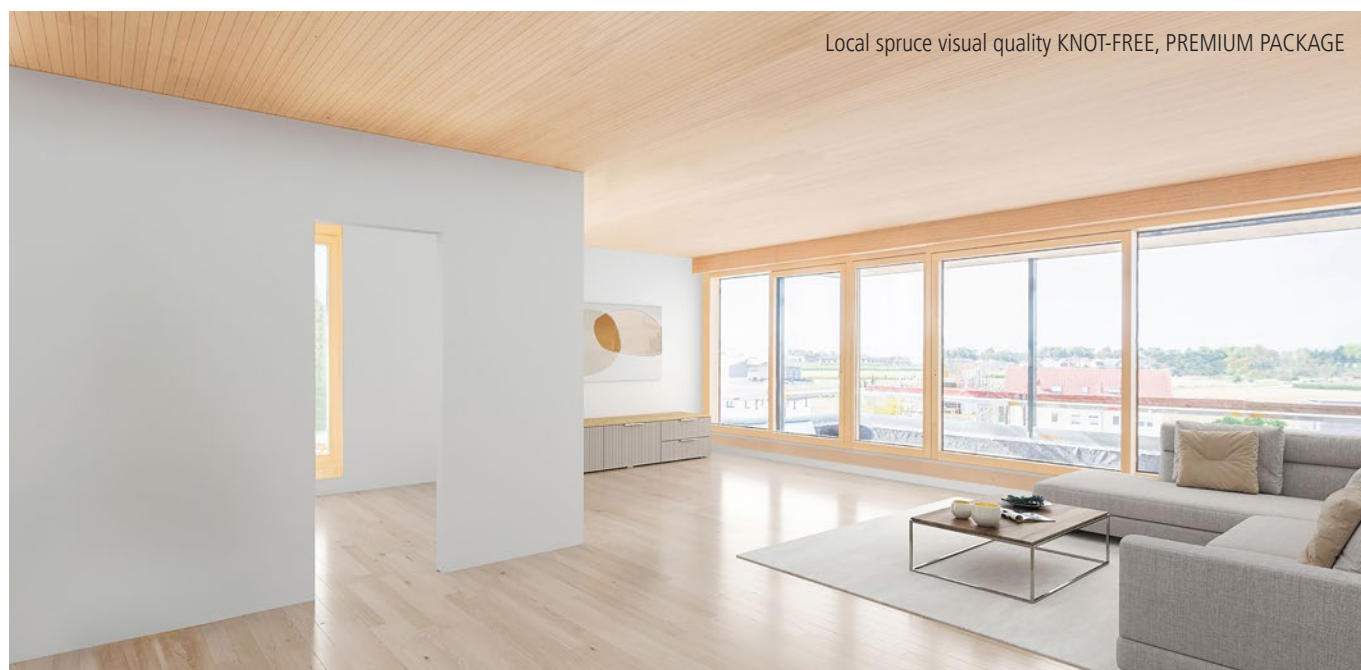

* **KNOT-FREE** | The special cut in our new state of the art sawmill from local spruce results in a surface with few knots. Only a few small knots are possible. This creates a calm and elegant visual overall appearance. best wood SCHNEIDER recommends the PREMIUM PACKAGE for local spruce KNOT-FREE.

Certificates (Download at www.schneider-holz.com)



Soundproofing



Fireproofing



Statics

More information
about our services
on page 4/5

Dimensioning tables Ceiling and roof systems

from page 51

best wood CLT BOX – CEILING FS

Wooden box element for multi-storey wood construction with soundproofing and fire protection requirements

Prices INCLUDING wood fiber acoustic board, chippings and drilling

Soundproofing and fire protection up to F60/REI60

Thickness [mm]	Assembly				Spruce NSI (planed)	Spruce SI (incl. Basic package)		Silver fir SI (incl. Basic package)
	GLULAM ribs width [mm]	GLULAM ribs height [mm]	Lower CLT panel [mm]	Upper CLT panel [mm]	Local	Scandinavian	Local KNOT-FREE*	Local
	220**	Prices calculated to 100 mm. 80 and 120 mm by request. 80/100/120 mm depending on statics. Dimensioning with best wood STATICS . Information on page 5.	100	60	60	by request	by request	by request
240**	120		60	60				
260	140		60	60				
280	160		60	60				
300	180		60	60				
320	200		60	60				
340	220		60	60				
360	240		60	60				
380	260		60	60				
400	280		60	60				
420	300		60	60				
440	320		60	60				
460	340		60	60				
480	360		60	60				

Soundproofing and fire protection up to F90/REI90

250**	Prices calculated to 100 mm. 80 and 120 mm by request. 80/100/120 mm depending on statics. Dimensioning with best wood STATICS . Information on page 5.	100	90	60	by request	by request	by request	by request
270**		120	90	60				
290		140	90	60				
310		160	90	60				
330		180	90	60				
350		200	90	60				
370		220	90	60				
390		240	90	60				
410		260	90	60				
430		280	90	60				
450		300	90	60				
470		320	90	60				
490		340	90	60				

**Clarify proof of fire protection and soundproofing

* KNOT-FREE: Description see page 21/49

Finishing options (invoiced profile dimensions)

PREMIUM PACKAGE UV-PROTECT PACK + ACOUSTIC DESIGN PACK + AQUA PROTECT PACK		Our recommendation for local spruce KNOT-FREE and silver fir	–	surcharge €/m ²	surcharge €/m ²
UV-PROTECT PACKAGE or COLOR PACKAGE surface cosmetics; sanded or rough-sawn look; UV-Protect, soft white, alpine white and light grey; further colours by request; with removable protective foil				surcharge €/m ²	
ACOUSTIC DESIGN PACKAGE Saw cuts 2/6 mm; distance between saw cuts 50 mm; coverage widths from 900 to 1200 mm at 50 mm intervals available; clarify proof of fire protection				surcharge €/m ²	
AQUA PROTECT PACKAGE Coating on top of the elements for protection from moisture. Joints, penetrations and recesses must be masked off.				surcharge €/m ²	
JOINERY Drilling, milling, notches, bevel cuts, countersinking and many more				by request	



Filling wood

- factory gluing of filling woods is possible
- for transmissions of vertical loads

Additional cost by request

Installation variants – Invoiced profile dimensions for variant 31 and 34



Further information from page 48

Delivery options

Length	2.30–16.00 m, from 440 mm 8.00–16.00 m	
Width	900–1200 mm	
Number of ribs	3	
Specification	Acoustic board	placed in the rafter and glued to the lower CLT panel ex works (wood fiber acoustic board)
	Drillings	ex works (for putting in the customer-provided chippings)
	Chippings	supplied in the required quantity and in 25 kg PE bags and put in by the customer on site
	Chippings plan	included in scope of delivery
Minimum production length	per element width 8.00 m	

Inlay board /separate tongue / characteristics / processing

see best wood CLT BOX page 24/25

Soundproofing

Description


best wood CLT BOX – CEILING FS rafter soundproofing was developed in our own, standard-compliant construction acoustics ceiling test bench and improves the impact sound insulation in the low-frequency range. Notes concerning possible floor construction on the CLT BOX – CEILING FS and the determined standard impact sound levels can be found at www.schneider-holz.com. Further information on page 5.

Fireproofing

Description

The fire safety technical certificate for F60 and F90 can be produced using our best wood STATICS software. General building regulations test certificates for F60 and F90 and classification reports REI60 and REI90 are available at www.schneider-holz.com.

Fire protection detail in ceiling joint of the CLT BOX – CEILING FS elements

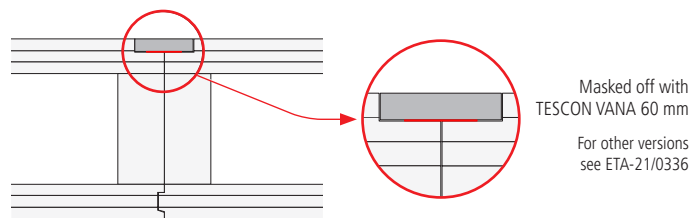

Certificates (Download at www.schneider-holz.com)



Soundproofing



Fireproofing

Statics

More information about our services on page 4/5

Dimensioning tables Ceiling and roof systems

from page 51

best wood CLT BOX

Wooden box element for large spans with fire protection requirements

best wood CLT with three glued-on GLULAM ribs and a CLT cover board

Soundproofing and fire protection up to F60/REI60

Assembly					Spruce NSI (planed)	Spruce SI (incl. Basic package)		Silver fir si (incl. Basic package)		
					Local	Scandinavian	Local KNOT-FREE*	Local		
Thickness [mm]	GLULAM ribs width [mm]	GLULAM ribs height [mm]	Lower CLT panel [mm]	Upper CLT panel [mm]						
220**	Prices calculated to 100 mm. 80 and 120 mm by request.	100	60	60	by request	by request	by request	by request		
240**		120	60	60						
260		140	60	60						
280		160	60	60						
300		180	60	60						
320		200	60	60						
340		80/100/120 mm depending on statics.	220	60					60	
360			240	60					60	
380			Dimensioning with best wood STATICS . Information on page 5.	260					60	60
400				280					60	60
420		300	60	60						
440		320	60	60						
460		340	60	60						
480		360	60	60						

**Clarify proof of fire protection and soundproofing

* KNOT-FREE: Description see page 21/49

Other variants

CLT BOX with FIBRE

- Suitable for flat roofs
- Blown out with best wood FIBRE ex works
- INTELLO variable vapor barrier laid ex works
- building physics calculation and approval regarding moisture protection with pro clima

Surcharge see table



Thickness [mm]	CLT BOX with FIBRE (surcharge per thickness)
220**	by request
240**	
260	
280	
300	
320	
340	
360	
380	
400	
420	
440	
460	
480	


Filling wood

- factory gluing of filling woods is possible
- for transmissions of vertical loads

Additional cost by request

Finishing options – description see page 22

Installation variants – Invoiced profile dimensions for variant 31 and 34

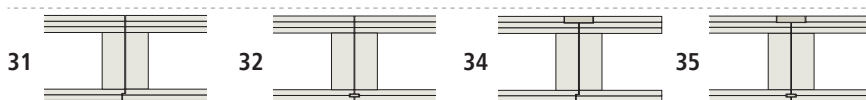

Further information from page 48

Inlay board for forming the ceiling section: Three-layer board SWP/2 S 3L according to EN 13353:2011, 22/100 mm in 5.00 m/piece

Inlay board for forming the ceiling section: Three-layer board SWP/2 S 3L according to EN 13353:2011, 27/100 mm in 5.00 m/piece

Separate tongue: Multiplex birch, 9/30 mm in 2.50 m/piece, chamfered on one side



Delivery options

Length	2.30–16.00 m, from 440 mm 8.00–16.00 m
Width	900–1200 mm
Number of ribs	3
Lower CLT panel	in 90 mm with increased fire protection requirements – by request
Minimum production length	per element width 8.00 m, chamfered on one side

Characteristics

Approval	ETA-21/0336
Strength class	Board C24; rib GL 24h
Application classes	Use in application classes 1 and 2 according to EN 1995-1-1
Drying	Kiln dried, wood moisture max. 15 % at delivery
Bonding	Clear, water-proof gluing with polyurethane adhesives (free of formaldehyde)
Lamellae	Board: 20, 30 mm; rib 40 mm
General information	Planed on four sides, bottom side chamfered 4 mm (measured diagonally)
Heat conductivity	Rib: $\lambda = 0.13$ (W/m*K); board: $\lambda = 0.12$ (W/m*K) according to ETA-21/0336
Specific heat capacity	1600 (J/kg*K) according to EN ISO 10456
CLT panel diffusion resistance	μ 20 (damp) / 50 (dry) in accordance with EN ISO 10456
Emission class	E1 according to DIN EN 717-1
Reaction to fire	D-s2, d0 according to DIN EN 13501-1
Fireproofing	Verification possible via the free best wood STATICS software
Airtightness	Airtight after testing in accordance with EN 12114 from 60 mm

Description

best wood CLT BOX is a statically effective and at the same time space-creating wood element, which is suitable for all ceiling requirements thanks to its versatile dimensions and excellent construction characteristics. A high-performance and versatile building product is created by utilising the advantages of solid timber and wood frame construction.

The combination of CLT and ribbing planks produces a high static load-bearing capacity with a comparatively low weight. The crosswise assembly from high-quality raw material in combination with high-quality gluing of edges and surfaces guarantees a high degree of dimensional stability. A high degree of prefabrication of the best wood CLT BOX with downstream cut-off and the simplicity of joining the best wood CLT BOX elements ensures swift and cheap installation and guarantees dry construction.

Advantages

- High static load-bearing capacity and comparatively low weight
- Large spans and therefore prop-free rooms possible
- High degree of prefabrication and simple joining of the ceiling elements for swift and cheap installation
- Utilises advantages of solid timber and wood frame construction



Certificates (Download at www.schneider-holz.com)



Soundproofing



Fireproofing



Statics

Dimensioning tables Ceiling and roof systems

More information about our services on page 4/5

from page 51

best wood **CLT BOX – CEILING** open




Open wooden box element for easy installation routing

best wood CLT with three glued-on GLULAM ribs

				Open at the TOP / BOTTOM	Open at the TOP	Open at the TOP	Open at the TOP
				Spruce NSI (planed)	Spruce SI (incl. Basic package)		Silver fir SI (incl. Basic package)
				Local	Scandinavian	Local KNOT-FREE*	Local
Thickness [mm]	GLULAM ribs width [mm]	GLULAM ribs height [mm]	CLT panel [mm]				
160	Prices calculated to 100 mm. 80 and 120 mm by request.	100	60	by request	by request	by request	by request
180		120	60				
200		140	60				
220		160	60				
240		180	60				
260		200	60				
280	80/100/120 mm depending on statics. Dimensioning with best wood STATICS . Information on page 5.	220	60				
300		240	60				
320		260	60				
340		280	60				
360		300	60				
380		320	60				
400		340	60				
420		360	60				
440		380	60				
460		400	60				

* KNOT-FREE: Description see page 21/49

■ ■ Finishing options (invoiced profile dimensions)

PREMIUM PACKAGE UV-PROTECT PACK + ACOUSTIC DESIGN PACK + AQUA PROTECT PACK	 <i>Our recommendation for local spruce KNOT-FREE and silver fir</i>	–	surcharge €/m ²	surcharge €/m ²
or				
UV-PROTECT PACKAGE or COLOR PACKAGE surface cosmetics; sanded or rough-sawn look; UV-Protect, soft white, alpine white and light grey; further colours by request; with removable protective foil		surcharge €/m ²		
ACOUSTIC DESIGN PACKAGE Saw cuts 2/6 mm; distance between saw cuts 50 mm; coverage widths from 900 to 1200 mm at 50 mm intervals available; clarify proof of fire protection		surcharge €/m ²		
AQUA PROTECT PACKAGE Coating on top of the elements for protection from moisture. Joints, penetrations and recesses must be masked off		surcharge €/m ²		
JOINERY Drilling, milling, notches, bevel cuts, countersinking and many more		by request		

Installation variants – Invoiced profile dimensions for variant 41



Further information from page 48

Inlay board for forming the ceiling section: Three-layer board SWP/2 S 3L according to EN 13353:2011, 22/100 mm in 5.00 m/piece

Inlay board for forming the ceiling section: Three-layer board SWP/2 S 3L according to EN 13353:2011, 27/100 mm in 5.00 m/piece

Separate tongue: Multiplex birch, 9/30 mm in 2.50 m/piece, chamfered on one side



Delivery options

Length	2.30–16.00 m, from 440 mm total height 8.00–16.00 m
Width	900–1200 mm
Number of ribs	3
Lower CLT panel	in 90 mm with increased fire protection requirements – by request
Minimum production length	per element width 8.00 m, chamfered on one side (only when open at the top)

Characteristics

Approval	ETA-21/0336
Strength class	Board C24; rib GL 24h
Application classes	Use in application classes 1 and 2 according to EN 1995-1-1
Drying	Kiln dried, wood moisture max. 15 % at delivery
Bonding	Clear, water-proof gluing with polyurethane adhesives (free of formaldehyde)
Lamellae	Board: 20, 30 mm; rib 40 mm
General information	Planed on four sides, bottom side chamfered 4 mm (measured diagonally) – only when open at the top
Emission class	E1 according to DIN EN 717-1
Reaction to fire	D-s2, d0 according to DIN EN 13501-1
Fireproofing	Verification possible via the free best wood STATICS software
Airtightness	Airtight after testing in accordance with EN 12114 from 60 mm

Description

best wood CLT BOX is a statically effective and at the same time space-creating wood element, which is suitable for all ceiling requirements thanks to its versatile dimensions and excellent construction characteristics. A high-performance and versatile building product is created by utilising the advantages of solid timber and wood frame construction.

The combination of CLT and ribbing planks produces a high static load-bearing capacity with a comparatively low weight. The crosswise assembly from high-quality raw material in combination with high-quality gluing of edges and surfaces guarantees a high degree of dimensional stability. A high degree of prefabrication of the best wood CLT BOX with downstream cut-off and the simplicity of joining the best wood CLT BOX elements ensures swift and cheap installation and guarantees dry construction.

Advantages

- High static load-bearing capacity and comparatively low weight
- High degree of prefabrication and simple joining of the ceiling elements for swift and cheap installation
- Utilises advantages of solid timber and wood frame construction
- Self-completion possible
- For inserting installations in the longitudinal direction



Certificates (Download at www.schneider-holz.com)



Soundproofing



Fireproofing



Statics

Dimensioning tables Ceiling and roof systems

More information about our services on page 4/5

from page 51

best wood CLT BOX – ROOF


Open box element for passive house construction

best wood CLT with two glued-on GLULAM ribs


				Spruce NSI (planed)	Spruce SI (incl. Basic package)		Silver fir SI (incl. Basic package)
				Local (planed)	Scandinavian	Local KNOT-FREE*	Local
Assembly							
Thickness [mm]	GLULAM ribs width [mm]	GLULAM ribs height [mm]	Lower CLT panel [mm]				
160	Prices calculated to 80 mm. 100 and 120 mm by request.	100	60	by request	by request	by request	by request
180		120	60				
200		140	60				
220		160	60				
240		180	60				
260		200	60				
280	80/100/120 mm depending on statics.	220	60				
300		240	60				
320	Dimensioning with best wood STATICS . Information on page 5.	260	60				
340		280	60				
360		300	60				
380		320	60				
400		340	60				
420		360	60				
440		380	60				
460		400	60				

* KNOT-FREE: Description see page 21/49

■ ■ Finishing options (invoiced profile dimensions)

UV-PROTECT PACKAGE or COLOR PACKAGE surface cosmetics; sanded or rough-sawn look; UV-Protect, soft white, alpine white and light grey; further colours by request; with removable protective foil		surcharge €/m ²
JOINERY Drilling, milling, notches, bevel cuts, countersinking and many more		by request

Installation variants – Invoiced profile dimensions for variant 26

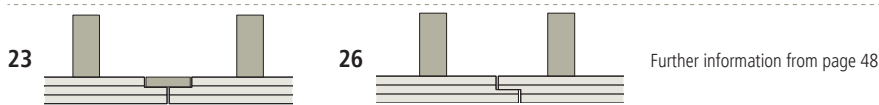

Inlay board for forming the ceiling section: Three-layer board SWP/2 S 3L according to EN 13353:2011, 22/100 mm in 5.00 m/piece

Inlay board for forming the ceiling section: Three-layer board SWP/2 S 3L according to EN 13353:2011, 27/100 mm in 5.00 m/piece

Delivery options

Length	2.30–16.00 m, from 440 mm 8.00–16.00 m
Width	1080–1200 mm, Shiplap edge ≤1150 mm cover size; smaller widths by request
Number of ribs	2
Lower CLT panel	in 90 mm with increased fire protection requirements – by request
Minimum production length	per element width 8.00 m



Characteristics

Approval	ETA-21/0336
Strength class	Board C24; rib GL 24h
Application classes	Use in application classes 1 and 2 according to EN 1995-1-1
Drying	Kiln dried, wood moisture max. 15 % at delivery
Bonding	Clear, water-proof gluing with polyurethane adhesives (free of formaldehyde)
Lamellae	Board: 20, 30 mm; rib 40 mm
General information	Planed on four sides, bottom side chamfered 4 mm (measured diagonally)
Emission class	E1 according to DIN EN 717-1
Reaction to fire	D-s2, d0 according to DIN EN 13501-1
Fireproofing	Verification possible via the free best wood STATICS software
Airtightness	Airtight after testing in accordance with EN 12114 from 60 mm

Description

The combination of CLT and ribbing planks produces a high static load-bearing capacity with a comparatively low weight. The crosswise assembly from high-quality raw material in combination with high-quality gluing of edges and surfaces guarantees a high degree of dimensional stability.

Advantages

- high static load-bearing capacity and comparatively low weight
- large spans and therefore prop-free rooms possible
- high degree of prefabrication and simple joining of the ceiling elements for swift and cheap installation
- utilises advantages of solid timber and wood frame construction
- high resistance to fire
- outstanding insulation characteristics due to insulation of spaces for passive house construction



Certificates (Download at www.schneider-holz.com)



Soundproofing



Fireproofing



Statics

Dimensioning tables Ceiling and roof systems

More information about our services on page 4/5

from page 51

best wood CLT – CEILING XL industrial quality

Cross laminated timber for solid ceiling structures


Width up to 3.00 m

		Local spruce Industrial quality							
Thick. [mm]	Layers	Layer structure							
		L	Q	L	Q	L			
3 layers	60	3			20	20	20		
	80	3			30	20	30		
	90	3			30	30	30		
	100	3			40	20	40		
	110	3			40	30	40		
	120	3			40	40	40		
5 layers			L	Q	L	Q	L		
	100	5		20	20	20	20	20	
	110	5		20	20	30	20	20	
	120	5		30	15	30	15	30	
	120	5		30	20	20	20	30	
	130	5		30	20	30	20	30	
	140	5		40	20	20	20	40	
	150	5		40	20	30	20	40	
	160	5		40	20	40	20	40	
	170	5		40	30	30	30	40	
	180	5		40	30	40	30	40	
	190	5		40	40	30	40	40	
	200	5		40	40	40	40	40	
	220	7		40 + 40	20	20	20	40 + 40	
	240	7		40 + 40	20	40	20	40 + 40	
	260	7		40 + 40	30	40	30	40 + 40	
280	7		40 + 40	40	40	40	40 + 40		
300	8		40 + 40	30	40 + 40	30	40 + 40		
320	8		40 + 40	40	40 + 40	40	40 + 40		
7 layers			L	Q	L	Q	L	Q	L
	340	9	40 + 40	30	40	40	40	30	40 + 40
	360	9	40 + 40	40	40	40	40	40	40 + 40

by request

20 = lamella thickness in mm ; L = lengthways layer ; Q = lateral layer

Installation variants – Invoiced profile dimensions for variant 11, 14 and 16

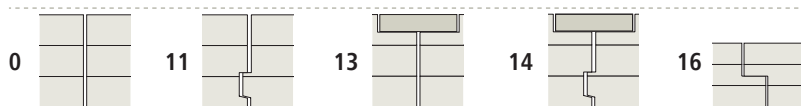

Further information from page 47

Including exact profiling!

Inlay board for forming the ceiling section: Three-layer board SWP/2 S 3L according to EN 13353:2011, 22/100 mm in 5.00 m/piece

Inlay board for forming the ceiling section: Three-layer board SWP/2 S 3L according to EN 13353:2011, 27/100 mm in 5.00 m/piece

Delivery options

Length	2.30–16.00 m
Width	up to 3000 mm
Minimum production length	per element width 8.00 m
Minimum production width	1800 mm
Other dimensions	Available by request

For characteristics and billing see page 34

best wood CLT – CEILING XL visual industrial quality



		Local spruce Visual industrial quality (one sided)							
Thickness [mm]	Layers	Layer structure							
		L	Q	L	L	Q	L	L	
3 layers	60	3			20	20	20		
	80	3			30	20	30		
	90	3			30	30	30		
	100	4			20 + 20	20	40		
	110	4			20 + 20	30	40		
	120	4			20 + 20	40	40		
5 layers	100	5	L	Q	L	Q	L		
			20	20	20	20	20		
	110	5							
			20	20	30	20	20		
	120	5							
			30	15	30	15	30		
	120	5							
			30	20	20	20	30		
	130	5							
			30	20	30	20	30		
	140	6							
			20 + 20	20	20	20	40		
	150	6							
			20 + 20	20	30	20	40		
	160	6							
		20 + 20	20	40	20	40			
170	6								
		20 + 20	30	30	30	40			
180	6								
		20 + 20	30	40	30	40			
190	6								
		20 + 20	40	30	40	40			
200	6								
		20 + 20	40	40	40	40			
220	8								
		20 + 20 + 40	20	20	20	40 + 40			
240	8								
		20 + 20 + 40	20	40	20	40 + 40			
260	8								
		20 + 20 + 40	30	40	30	40 + 40			
280	8								
		20 + 20 + 40	40	40	40	40 + 40			
300	9								
		20 + 20 + 40	30	40 + 40	30	40 + 40			
320	9								
		20 + 20 + 40	40	40 + 40	40	40 + 40			
7 layers			L	Q	L	Q	L		
	340	10	20 + 20 + 40	30	40	40	30	40 + 40	
	360	10	20 + 20 + 40	40	40	40	40	40 + 40	

by request

20 = lamella thickness in mm ; L = lengthways layer ; Q = lateral layer

Transport / delivery

Transport costs (for transport options see page 34) by request

Floor battens

Drill holes for lifting systems

Finishing options (invoiced profile dimensions)

JOINERY | Drilling, milling, notches, bevel cuts, countersinking and many more by request

Certificates (Download at www.schneider-holz.com)



Dimensioning tables Ceiling and roof systems

More information about our services on page 4/5

from page 51

best wood **CLT – WALL XL** industrial quality

Cross laminated timber for solid wall structures

Height up to 3.50 m


Local spruce
Industrial quality

	Thick. [mm]	Layers	Layer structure						
			Q	L	Q	L	Q		
3 layers	60	3			20	20	20		
	80	3			30	20	30		
	90	3			30	30	30		
	100	3			40	20	40		
	110	3			40	30	40		
	120	3			40	40	40		
5 layers	100	5		Q	L	Q	L	Q	
				20	20	20	20	20	
	110	5		20	20	30	20	20	
	120	5		30	15	30	15	30	
	120	5		30	20	20	20	30	
	130	5		30	20	30	20	30	
	140	5		40	20	20	20	40	
	150	5		40	20	30	20	40	
	160	5		40	20	40	20	40	
	170	5		40	30	30	30	40	
	180	5		40	30	40	30	40	
	190	5		40	40	30	40	40	
	200	5		40	40	40	40	40	
	220	7		40 + 40	20	20	20	40 + 40	
	240	7		40 + 40	20	40	20	40 + 40	
260	7		40 + 40	30	40	30	40 + 40		
280	7		40 + 40	40	40	40	40 + 40		
300	8		40 + 40	30	40 + 40	30	40 + 40		
320	8		40 + 40	40	40 + 40	40	40 + 40		
7 layers	340	9	Q	L	Q	L	Q	L	Q
			40 + 40	30	40	40	40	30	40 + 40
	360	9	40 + 40	40	40	40	40	40	40 + 40

by request

20 = lamella thickness in mm ; L = lengthways layer ; Q = lateral layer

Installation variants – Invoiced profile dimensions for variant 16

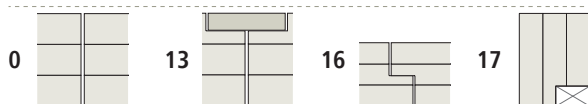

NEW for threshold profile

Further information from page 47

Including exact profiling!

Inlay board for forming the ceiling section: Three-layer board SWP/2 S 3L according to EN 13353:2011, 22/100 mm in 5.00 m/piece

Inlay board for forming the ceiling section: Three-layer board SWP/2 S 3L according to EN 13353:2011, 27/100 mm in 5.00 m/piece

Delivery options

Length	2.30–16.00 m
Height	up to 3500 mm
Minimum production length	per element width 8.00 m
Minimum production width	1800 mm
Other dimensions	Available by request

For characteristics and billing see page 34

best wood **CLT – WALL XL** visual industrial quality



		Local spruce Visual industrial quality (one sided)								
Thick. [mm]	Layers	Layer structure								
		Q	L	Q	L	Q	L	Q		
3 layers	60	3			20	20	20			
	80	3			30	20	30			
	90	3			30	30	30			
	100	4			20 + 20	20	40			
	110	4			20 + 20	30	40			
	120	4			20 + 20	40	40			
5 layers	100	5		Q	L	Q	L	Q		
	110	5		20	20	20	20	20		
	120	5		20	20	30	20	20		
	120	5		30	15	30	15	30		
	120	5		30	20	20	20	30		
	130	5		30	20	30	20	30		
	140	6		20 + 20	20	20	20	40		
	150	6		20 + 20	20	30	20	40		
	160	6		20 + 20	20	40	20	40		
	170	6		20 + 20	30	30	30	40		
	180	6		20 + 20	30	40	30	40		
	190	6		20 + 20	40	30	40	40		
	200	6		20 + 20	40	40	40	40		
	220	8		20 + 20 + 40	20	20	20	40 + 40		
	240	8		20 + 20 + 40	20	40	20	40 + 40		
	260	8		20 + 20 + 40	30	40	30	40 + 40		
280	8		20 + 20 + 40	40	40	40	40 + 40			
300	9		20 + 20 + 40	30	40 + 40	30	40 + 40			
320	9		20 + 20 + 40	40	40 + 40	40	40 + 40			
7 layers	340	10	Q	L	Q	L	Q	L	Q	
			20 + 20 + 40	30	40	40	40	30	40 + 40	
	360	10	20 + 20 + 40	40	40	40	40	40	40 + 40	

by request

20 = lamella thickness in mm ; L = lengthways layer ; Q = lateral layer

Transport / delivery

Transport costs (for transport options see page 34)

by request

Floor battens

Drill holes for lifting systems

Finishing options (invoiced profile dimensions)

JOINERY | Drilling, milling, notches, bevel cuts, countersinking and many more

by request

Certificates (Download at www.schneider-holz.com)



Soundproofing



Fireproofing



Statics

More information
about our services
on page 4/5

Dimensioning tables Ceiling and roof systems


from page 51

best wood CLT – XL

Characteristics

Approval	ETA-21/0568
Strength class	C24
Application classes	Use in application classes 1 and 2 according to EN 1995-1-1
Drying	Kiln dried, wood moisture max. 15 % at delivery
Bonding	Clear, water-proof gluing with polyurethane adhesives (free of formaldehyde)
Lamellae	20, 30 and 40 mm, sorted for quality and finger-jointed
General information	Planed on four sides, bottom side chamfered 4 mm (measured diagonally), trimmed precisely ± 1 mm
Heat conductivity	$\lambda = 0.12$ (W/m*K) according to ETA-21/0568
Specific heat capacity	1600 (J/kg*K) according to EN ISO 10456
CLT panel diffusion resistance	μ 20 (damp) / 50 (dry) in accordance with EN ISO 10456
Emission class	E1 according to DIN EN 717-1
Shape change	At board level ≈ 0.02 % per 1 % change in wood moisture perpendicular to board level ≈ 0.24 % per 1 % change in wood moisture
Reaction to fire	D-s2, d0 according to DIN EN 13501-1
Fireproofing	Verification possible via the free best wood STATICS software
Airtightness	Airtightness after testing in accordance with EN 12114 from 60 mm





Billing example for best wood CLT – XL

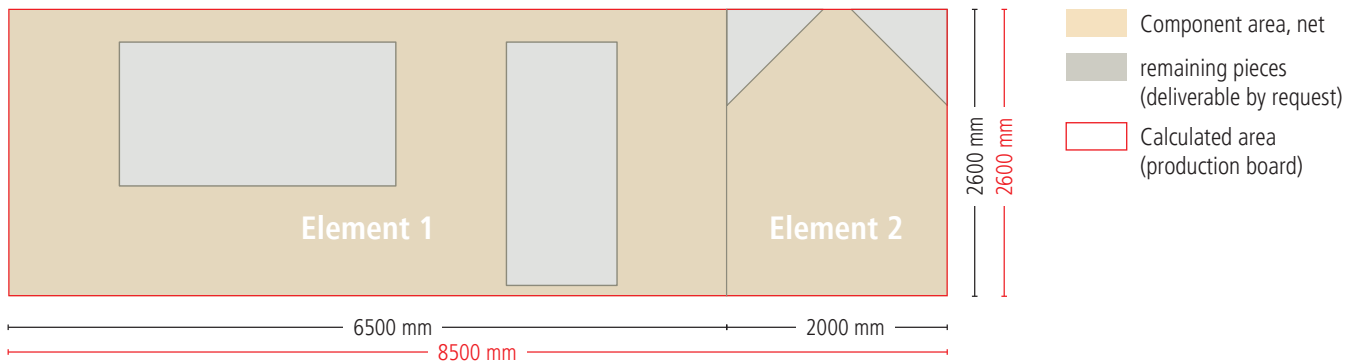

Delivery and transport of best wood CLT – XL

The wooden elements must not be exposed to the external climate or extreme climate conditions (e.g. direct moisture impact) at any time.

- The components are protected by a film during transport.
- The customer is responsible for weather protection once the components are on the construction site. The elements / packages are not packed individually ex works.



	Horizontal transport best wood trailer	Horizontal transport best wood low loader with swap body	Vertical transport best wood low loader with swap body	Vertical transport best wood inloader with removable pallet
Length:	≤ 15.60 m	≤ 15.80 m	≤ 15.80 m	≤ 10.75 m
Width / height:	≤ 3.00 m	≤ 3.00 m	$\leq 2.80 - 3.00$ m	≤ 3.50 m

Elements which exceed the dimensions listed in the table are considered special transports!

These must be requested in good time, as we require a lead time to organise the transport.

Lifting systems / turning system

SIHGA PICK LIFTING SYSTEM for up to 20,000 load cycles

Minimum wood thickness: with planar lifting ≥ 80 mm, with frontal lifting ≥ 90 mm

Note: The application instructions of the respective manufacturer (e.g. check drill hole) must be observed before lifting the elements using lifting/turning systems.




Item no.	Designation	PU	UP
6205SIHGAPICK	2 x Sihga Pick lifting aid in transport case, without drill bit	1 case	case
6205SIHGAPICK-BOHRUNGEN	Drill hole SIHGA PICK	1 pieces	piece

WÜRTH LIFTING SYSTEM

Minimum wood thickness: with planar lifting ≥ 120 mm, with frontal lifting ≥ 160 mm (with locking screw)

The transport anchoring screw is installed countersunk in the element by approx. 10 mm using bit insert AW40.

Note: The application instructions of the respective manufacturer (e.g. check drill hole) must be observed before lifting the elements using lifting/turning systems.

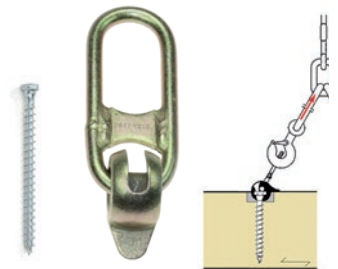

Item no.	Designation	PU	UP
6206TRANSPORTANKER	Transportation anchor	2 pieces	2 pieces
6203SCHRAUBE12x100/60	Transportation anchor screw 12x100/60	50 pcs./pack	pack
6203SCHRAUBE12x120/100	Transportation anchor screw 12x120/100	50 pcs./pack	pack
6203SCHRAUBE12x160/145	Transportation anchor screw 12x160/145	50 pcs./pack	pack
6204BITEINSATZ	Bit insert AW40 mm	1 pieces	piece
6204WÜRTH-BOHRUNGEN	Drill hole Würth lifting systems	1 pieces	piece

Fasteners

X-fix® C

X-fix® C is a two-piece, self-tightening wood-wood connector for compression and tension-proof connection of CLT ceilings and walls. X-fix® C is a wedge-shaped dovetail wood-wood connector. The X-fix® C wedge shape even clamps large-format ceiling panels or wall parts in a self-tightening, form-fitting way. The advantages of X-fix® C: Fast installation, form-fitting connection is ideal for visible surfaces, no panel tighteners required for ceiling connections, and thanks to the wedge shape, X-fix® C even clamps large-format ceiling panels together in a self-tightening way, no metal in the pure wood-wood connection.



Item no.	Designation	PU	UP
6209X-FIX	X-fix® C 96/130/90	1 pieces	piece
6209X-FIX-BOHRUNGEN	Drill hole for X-fix (both sides)	1 pieces	piece

Note: Only with CLT in conjunction with a tongue & groove connection possible

HECO-TOPIX® plus

Full-thread screw with cylinder head, ETA-19/0553 for a cross screw connection at the ceiling element joint creating a static ceiling section. Verification possible via best wood STATICS.

Item no.	Delivery form	PU	UP
6229ZK6/160	6 x 160 mm	100 pcs./pack	pack



Soundproofing

best wood BOUNDSPLITT

best wood BOUNDSPLITT is a chippings binder for manufacturing a flexibly bound chippings filling for improving the soundproofing of wooden ceilings.

best wood BOUNDSPLITT remains flexible after drying, and is therefore acoustically comparable with the best wood CHIPPINGS in the best wood HONEYCOMB. Filling heights of 30 to 120 mm can be realised. Approximately 0.3 kg of binder is needed with dry 5/8 chippings per m² and filling height of 10 mm. The drying time under optimum conditions and dry chippings is approx. 6 days for a filling height of 80 mm. The mixture of chippings binder and chippings can be applied using a screed pump.

best wood BOUNDSPLITT will keep for 12 months. The storage temperature must not fall below 5°C. The processing temperature is 5° C to 35° C.

More information about processing can be found in the technical data sheet at www.schneider-holz.com. Acoustically tested component structures with best wood BOUNDSPLITT can be found in the component database on our web site.

Transportation charges on request.



Item no.	Designation	PU	UP
6220BOUNDSPLITT	BoundSplitt canister	20 kg	kg
6220BOUNDSPLITTIBC	BoundSplitt IBC container	1000 kg	kg

best wood CHIPPINGS

best wood CHIPPINGS consist of a grain made from natural calcium carbonate, which is manufactured using state-of-the-art grinding and drying systems and sieving machines. It is used for putting into the best wood CLT BOX – CEILING FS and as ballast in best wood ceiling elements.



Item no.	Designation	PU	UP
6220SCHUETTUNG	best wood CHIPPINGS bag	25 kg/bag, 40 bags/pallet	Bag
6220SCHUETTUNGBIGBAG	best wood CHIPPINGS Big Bag	1000 kg/Big Bag on pallet	Big Bag

Delivery of best wood CHIPPINGS in loose form in silo vehicle by request.

best wood EASY FILL


best wood EASY FILL makes easy and quick filling of best wood CHIPPINGS in a predefined quantity into the CLT BOX – CEILING FS possible.



Item no.	Designation	PU	UP
6231EASYFILLKAUF	best wood EASY FILL for buying	1 piece	piece
6231EASYFILLPFAND	best wood EASY FILL deposit	1 piece	piece

best wood HONEYCOMB 30/60

HONEYCOMB is a honeycomb board made from cardboard which prevents the best wood CHIPPINGS from moving or shifting. Laying the chippings directly on the honeycomb provides a consistent layer thickness.

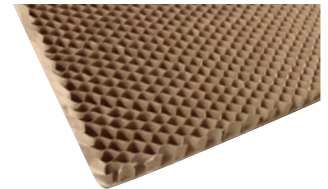

Item no.	Designation	PU	UP
6221WABE30	best wood HONEYCOMB 30	1.5 m ² /board, 30 boards/pallet	m ²
6221WABE60	best wood HONEYCOMB 60	1.5 m ² /board, 15 boards/pallet	m ²

Filling quantity of best wood CHIPPINGS in best wood HONEYCOMB 30/60: HONEYCOMB 30 approx. 42 kg/m² | HONEYCOMB 60 approx. 84 kg/m²

SILENT FLOOR EVO insulating mat

SILENT FLOOR EVO is an insulating material made from recycled Latex and foam material. One roll is sufficient for 15 m² and complements the soundproofing perfectly in its structure.



© rothoblass

Item no.	Thickness	Roll length	Roll width	Roll weight	PU
6225SILENTFLOOR	10 mm	10 m	1.6 m	16.5 kg	15 m ² /roll, 6 rolls/pallet

Fireproofing

Hilti CFS-S ACR fire protection sealing compound

Acrylate-based fire protection sealing compound for sealing element joints with fire protection requirements for the best wood CLT BOX - CEILING FS

Hilti CP 611A/CFS-IS fire protection sealing compound


Intumescent fire protection sealing compound for sealing individual cable entries and the Hilti cable sleeve CFS-SL GA in the best wood CLT BOX – CEILING FS




Advice and sale by HILTI

Please reach out to your local Hilti customer service or Hilti sales representative

Example of element joints construction with fire resistance requirement up to F60:

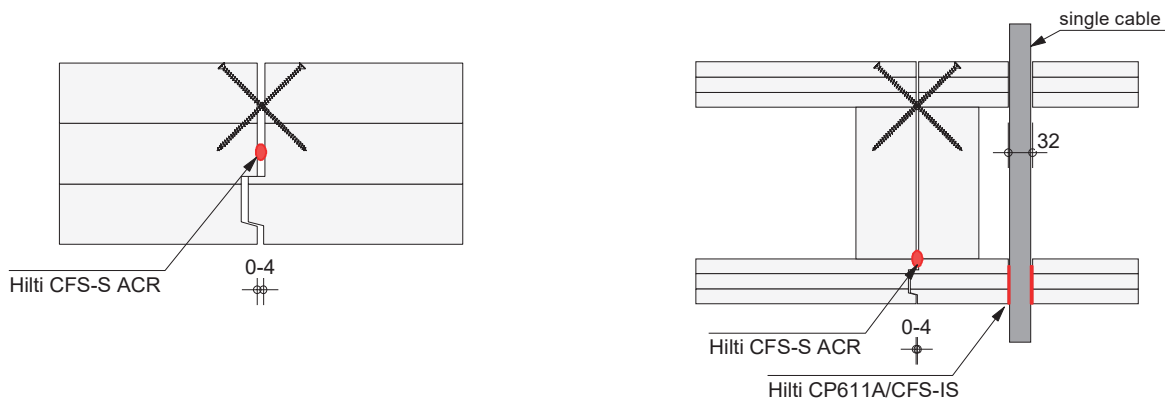

Example support with fire resistance requirement up to F60:

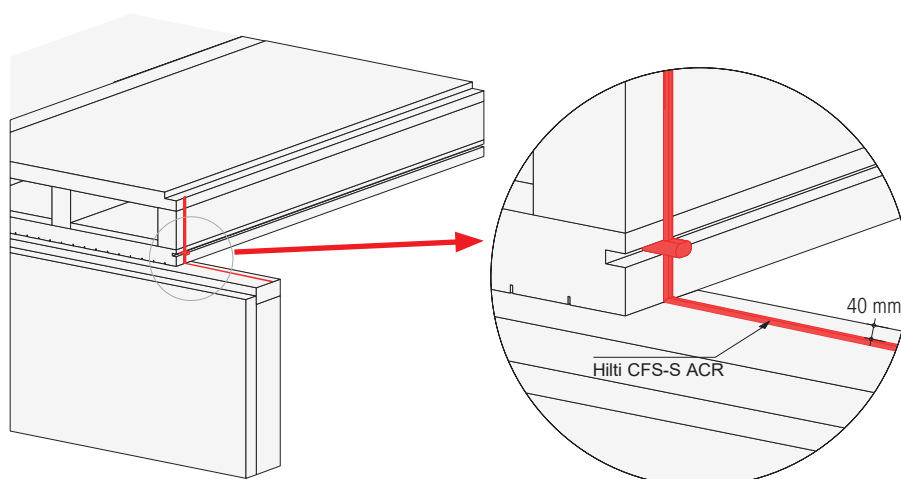

Other element joints constructions, leadthroughs through the element or installations with fire resistance requirements for CLT BOX can be found in ETA-21/0336 and for CLT in ETA-21/0568.

For the planning of the individual versions or details, please note the technical specifications with regard to fasteners and connection distances in ETA-21/0336 and ETA-21/0568.

Vapor barrier and airtight sealing membrane

WETGUARD® 200 SA 390 or 1560 mm


Rain-proof and robust membrane that is self-adhesive over its entire surface for reliable moisture protection of wooden elements during transport, installation and construction time.

Application area

Indoors and outdoors

Advantages

Fleece with non-slip coating and adhesive application over the entire surface. Transparent, robust and abrasion resistant



s_d value	3.5 m
Reaction to fire	E
Outdoor weather exposure	3 months
Watertight	W1
Temperature resistance	-40 °C to +80 °C

Item no.	Roll length	Roll width	Area	Roll weight
6233SIGAWETGUARD390	50 m	390 mm	19.6 m ² /roll	6.2 kg
6233SIGAWETGUARD1560	50 m	1560 mm	78 m ² /roll	24.6 kg

TESCON VANA


Multi-purpose adhesive tape with fleece back

Field of application

Can be used to form a secure and permanent seal on overlaps between foil and fleece membranes (vapor barriers and airtight sealing membranes, roof underlays and wall membranes) and joins between them. It is also suitable for sealing butt joints between wood-based material panels.

Advantages

Long-lasting sealed bonds, indoors and outdoors; with pliable fleece backing; can be torn off by hand; for airtight bonds in accordance with DIN 4108-7, SIA 180 and ÖNorm B8110-2; high initial adhesiveness; extremely high final adhesion; waterproof adhesive.

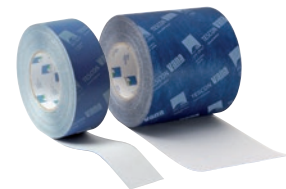

developed and produced by pro clima

Backing	Special PP fleece
Separating layer	Siliconized paper
Temperature resistance	Long term -40 °C to +90 °C
Processing temperature	From -10 °C
Outdoor weather exposure	6 months

Item no.	Roll length	Roll width	Contents	KG / PU
6102TESCONVANA60	30 m	60 mm	10 rolls/carton	6 kg
			1 roll	0.6 kg
6102TESCONVANA150	30 m	150 mm	2 rolls	3 kg

Lighting systems



Description

Nowadays the solution in many areas consists of LEDs, whose efficiency is enhanced by intelligent light controls and innovative operating devices. The new, dimmable LED lighting systems for our ceiling and roof systems are high quality, and impress with their timeless design. This guarantees that you will realize long-lasting lighting ideas. Suitable holes drilled in the factory make installation child's play, the lamps just need to be cabled and clipped in place.

■ ■ RECESS MOUNTED LIGHTS

LED 170 round

The lighting systems are coordinated with our best wood GLULAM and CLT ceilings and CLT BOX, and can be supplied ready-drilled with the relevant holes at an additional cost.

Even light distribution over the entire light outlet surface.
Dimmable with a trailing edge dimmer.

The lights are only suitable for indoors and for connecting to safety extra-low voltage.

Item no.	Designation	PU	UP
6222-170RW	LED 170 round white	1 pc.	piece
6222-170RTM	LED 170 round matt titanium	1 pc.	piece
6222-170R-BOHRUNGEN	Drill holes for LED 170	1 pc.	piece



Wattage [Watt]	11
Connection voltage [Volts]	230
Lamp	SMD LED
Light colour	Warm white
Colour temperature [Kelvin]	Approx. 3000 K
Luminous flux [Lumen]	840 lm
Colour rendering	Ra > 80
Material	Aluminum/PMMA diffusor disk
Operating device (transformer)	Included (packaged separately)
Dimmable	yes
Degree of protection	IP20
Installation depth	55 mm with best wood ceiling systems
External diameter	170 mm

LED 195 square

The lighting systems are coordinated with our best wood GLULAM and CLT ceilings and CLT BOX, and can be supplied ready-drilled with the relevant holes at an additional cost.

Even light distribution over the entire light outlet surface.
Dimmable with a trailing edge dimmer.

The lights are only suitable for indoors and for connecting to safety extra-low voltage.

Item no.	Designation	PU	UP
6222-195QW	LED 195 square white	1 pc.	piece
6222-195QTM	LED 195 square matt titanium	1 pc.	piece
6222-195Q-BOHRUNGEN	Drill holes for LED 195	1 pc.	piece



Wattage [Watt]	10
Connection voltage [Volts]	230
Lamp	SMD LED
Light colour	Warm white
Colour temperature [Kelvin]	Approx. 3000 K
Luminous flux [Lumen]	870 lm
Colour rendering	Ra > 80
Material	Aluminum/PMMA diffusor disk
Operating device (transformer)	Included (packaged separately)
Dimmable	yes
Degree of protection	IP20
Installation depth	55 mm with best wood ceiling systems
External diameter	195 mm

LED 90 spot

The lighting systems are coordinated with our best wood GLULAM and CLT ceilings and CLT BOX, and can be supplied ready-drilled with the relevant holes at an additional cost.

The reflector is made from real glass, and the lighting system is dimmable with a trailing edge dimmer.

The lights are only suitable for indoors and for connecting to safety extra-low voltage.

Item no.	Designation	PU	UP
6222-90SPOTW	LED 90 Spot white	1 pc.	piece
6222-90SPOTN	LED 90 Spot nickel brushed	1 pc.	piece
6222-90SPOT-BOHRUNGEN	Drill holes for LED 90 Spot	1 pc.	piece



White



Nickel brushed

Wattage [Watt]	8
Connection voltage [Volts]	230
Lamp	COB LED
Light colour	Warm white
Colour temperature [Kelvin]	Approx. 3000 K
Luminous flux [Lumen]	850 lm
Colour rendering	Ra > 90
Material	Diecast aluminum/real glass reflector
Radiation angle, swivelling	38 degrees
Operating device (transformer)	Included (packed with spot)
Dimmable	yes
Degree of protection	IP40
Installation depth	75 mm with best wood ceiling systems
External diameter	90 mm

LED 90 FireSpot

Even demanding lighting tasks can be solved without problems with the LED 90 FireSpot, thanks to the high light output. Installation in the BS3700TC fire protection box fulfils the requirements for fire protection shielding in a best wood ceiling element with a fire resistance duration of 60 minutes.

The LED 90 FireSpot can only be purchased in combination with a BS3700TC fire protection box.

The lighting systems are coordinated with our best wood GLULAM, CLT and CLT BOX ceiling elements, and can be supplied ready-drilled with the relevant holes at an additional cost.

Item no.	Designation	PU	UP
6222-90FSPOTW-BS3700TC	LED 90 FireSpot, white, including BS3700TC fire protection box	1 pc.	piece
6222-90FSPOTN-BS3700TC	LED 90 FireSpot, nickel brushed, including BS3700TC fire protection box	1 pc.	piece
6222-90FSPOT-BOHRUNGEN	Drill holes for LED 90 FireSpot	1 pc.	piece



White



Nickel brushed

Wattage [Watt]	7
Connection voltage [Volts]	230
Lamp	LED
Light colour	Warm white
Colour temperature [Kelvin]	3000 K
Luminous flux [Lumen]	650 lm
Colour rendering	Ra > 80
Material	Aluminum
Operating device (transformer)	incl.
Dimmable	yes
Degree of protection	IP44
Installation depth	with fire protection box 62 mm
External diameter	90 mm

BS3500TC fire protection box

The BS3700TC is a fire protection box which has been developed for installation in solid wood ceilings and walls, for fire protection shielding up to EI60.

Due to the newly developed and patented f-tronic® TC fastening system with claw, the box can be quickly and easily attached in the solid wood. The intumescent material seals the opening in the event of a fire.



■ ■ SURFACE MOUNTED LIGHTS

The surface mounted lighting systems are tailored to our best wood GLULAM, CLT and CLT BOX ceilings, and can be directly attached to the ceiling. Even light distribution over the entire light outlet surface and the lights are dimmable with a trailing edge dimmer. The lights are only suitable for indoors and for connecting to safety extra-low voltage.

- Very low installation height of just 15 mm
- Elegant design
- Different colour temperatures possible
- Integrated transformer

LED 165 | 217 Standard

Available in colour temperatures of 3000 or 4000 Kelvin.

Item no.	Designation	PU	UP
6226-165STW3K	LED 165 Standard round white 3000 K	1 pc.	piece
6226-165STW4K	LED 165 Standard round white 4000 K	1 pc.	piece
6226-217STW3K	LED 217 Standard round white 3000 K	1 pc.	piece
6226-217STW4K	LED 217 Standard round white 4000 K	1 pc.	piece
6226-165STN3K	LED 165 Standard round nickel brushed 3000 K	1 pc.	piece
6226-165STN4K	LED 165 Standard round nickel brushed 4000 K	1 pc.	piece
6226-217STN3K	LED 217 Standard round nickel brushed 3000 K	1 pc.	piece
6226-217STN4K	LED 217 Standard round nickel brushed 4000 K	1 pc.	piece



Wattage [Watt]	12 (LED 165) or 18 (LED 217)
Connection voltage [Volts]	230
Lamp	SMD LED
Light colour	Warm white - neutral white
Colour temperature [Kelvin]	3000 or 4000 K
Luminous flux [Lumen]	with 3000 K: 1000 or 1550 with 4000 K: 1100 or 1600
Colour rendering	Ra > 80
Material	Aluminum/plastic
Operating device (transformer)	integrated
Dimmable	yes
Degree of protection	IP20
Installation height	15 mm
External diameter	165 mm or 217 mm

LED 165 | 217 Premium

The color temperature with all Premium models are adjustable between 3000, 4000 or 6500 Kelvin.

Item no.	Designation	PU	UP
6226-165PRW	LED 165 Premium round white	1 pc.	piece
6226-217PRW	LED 217 Premium round white	1 pc.	piece
6226-165PQW	LED 165 Premium square white	1 pc.	piece
6226-217PQW	LED 217 Premium square white	1 pc.	piece
6226-165PRN	LED 165 Premium round nickel brushed	1 pc.	piece
6226-217PRN	LED 217 Premium round nickel brushed	1 pc.	piece
6226-165PQN	LED 165 Premium square nickel brushed	1 pc.	piece
6226-217PQN	LED 217 Premium square nickel brushed	1 pc.	piece



Wattage [Watt]	12 (LED 165) or 18 (LED 217)
Connection voltage [Volts]	230
Lamp	SMD LED
Light colour	Warm white - neutral white
Colour temperature [Kelvin]	3000, 4000, 6500 K (adjustable)
Luminous flux [Lumen]	1000 or 1700 lm
Colour rendering	Ra > 80
Material	Aluminum/plastic
Operating device (transformer)	integrated
Dimmable	yes
Degree of protection	IP20
Installation height	15 mm
External diameter	165 mm or 217 mm

Finishing and protection from the factory

AQUA PROTECT

All-over coating to provide protection from moisture

Description

Our coating for the surface of your ceiling elements provides protection from moisture, repels water and is free of solvents. In order to protect your best wood SCHNEIDER ceilings from moisture, joints and penetrations merely need to be carefully masked off with AQUA PROTECT. We would be pleased to supply you with suitable TESCON VANA masking tape. Best wood AQUA PROTECT is applied directly during production and the ceiling element is delivered to your site including the water-repellent coating.

Water-repellent

Solvent-free



Aqua Protect

Coating

COLOUR FINISHING + UV PROTECTION

Description

Building elements with mineral paint or the colourless UV protect paint applied, for internal application, are delivered ready picked with a protective film to the construction site. The colours impress with their matt look and durability. All best wood glazes retain the diffusion-open characteristics of the wood and provide a good room and living climate. The natureplus-certified coated elements are available in a sanded and rough sawn look.

Characteristics

Mineral matt

Water-based

Without solvents and plasticisers

Natureplus certified

Diffusion-open

Sustainable

For a good indoor and living climate


Remarks

The representations of colours and products may differ from the actual colouring. Wood is a natural product. Colour deviations due to differences in structure and grain are possible and typical.

Further colours available by request.

You are welcome to send us an e-mail to info@schneider-holz.com. You will receive handsheets from us by return of post for selecting colour and structure.

Colour variants / structure variants

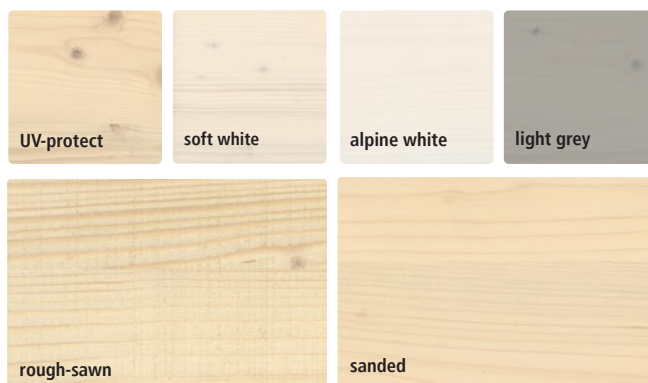

Certificates (Download at www.schneider-holz.com)




Accessories for finished ceilings can be found from page 44/45.

ACOUSTIC DESIGN

Description

The saw cuts are 2 mm wide and 6 mm deep, and the distance between the slots is 50 mm. The Acoustic design is available in coverage widths of 900 to 1200 mm at 50 mm intervals. Fire protection verification should be clarified depending on requirements.

We recommend the ACOUSTIC DESIGN PACKAGE with spruce KNOT-FREE and silver fir.

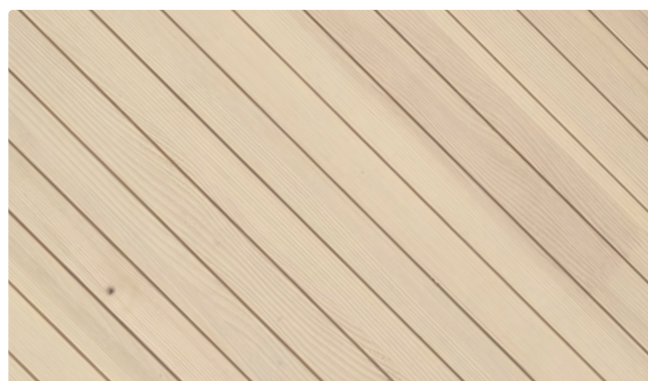

Accessories for ceiling finishing

Soft wax

Soft wax for surface correction of the best wood painted ceilings for repairing scratches, cracks, holes and dents in the surface area. Coordinated with the best wood colour variants.

Item no.	Designation	PU	UP
6213WACHS	Soft wax, available colours: transparent, UV-protect, soft white, alpine white	2 pcs./pack	pack
6213WACHS	Soft wax, available colours: light grey	2 pcs./pack	pack



Soft wax spatula

Soft wax spatula for applying and modelling soft wax during surface correction.


Item no.	Designation	PU	UP
6214WACHSSPACHTEL	Soft wax spatula	1 pieces	piece



best wood CEILING TAPE

Ceiling tape for masking all best wood painted ceilings. The ceiling tape is available with a width of 50 mm, and prevents adhesive residue on the varnished surfaces. 50 running metres per roll.

Item no.	Designation	PU	UP
6210DECKENTAPE	best wood Ceiling tape	50 rmt/roll	roll



Training

Colour processing training

You will be given tips and tricks in your training for the handling of our painted ceilings and the processing of Timberbase and Timbercolor. Let us get you ready!

Training
On-site training

Colours for processing at home

Please note the special processing guidelines for colour finishing!
read more at www.schneider-holz.com

TIMBERBASE

Primer for visible wooden elements indoors.

TIMBERBASE has been developed as an environmentally friendly industrial product for priming visible wooden elements indoors, such as cross laminated timber (CLT) or GLULAM (BSH), which are subsequently going to be treated with TIMBERCOLOR or UV-protect. Installation guidelines can be found at www.schneider-holz.com.

Item no.	Designation	PU	UP
6228TIMBERBASE	TIMBERBASE	1.0 l	litre
6228TIMBERBASE	TIMBERBASE	2.5 l	litre
6228TIMBERBASE	TIMBERBASE	5.0 l	litre



TIMBERCOLOR

Coloured finish for visible wooden elements indoors.

TIMBERCOLOR has been developed as an environmentally friendly industrial product for coating visible wooden elements indoors, such as cross laminated timber (CLT) or GLULAM (BSH), which are subsequently going to be given an elegant, ultra-matt and transparent appearance. TIMBERBASE must be applied as the primer.

The following colours are available:

soft white, alpine white, light grey. Further colours by request. Installation guidelines can be found at www.schneider-holz.com.

Item no.	Designation	PU	UP
6228TIMBERCOLOR	TIMBERCOLOR – any colour available	1.0 l	litre
6228TIMBERCOLOR	TIMBERCOLOR – any colour available	2.5 l	litre
6228TIMBERCOLOR	TIMBERCOLOR – any colour available	5.0 l	litre



UV-protect

Transparent finish for visible wooden elements indoors


The transparent UV-protect glaze variant protects the light colour of the spruce, and is also suitable for independent application. TIMBERBASE must be applied as the primer. Installation guidelines can be found at www.schneider-holz.com.

Item no.	Designation	PU	UP
6228TIMBERCOLORUVPROTECT	UV-protect	1.0 l	litre
6228TIMBERCOLORUVPROTECT	UV-protect	2.5 l	litre
6228TIMBERCOLORUVPROTECT	UV-protect	5.0 l	litre




Installation variants best wood GLULAM


Installation variants best wood GLULAM – CEILING 100–280 mm



Variant 0
Square edge




Variant 1
2 cm double groove and tongue




Variant 2

19 x 38 mm separate tongue




Variant 3

Standard rabbeting
23/51 mm
alternatively 28/51 mm
Special rabbeting
max. 30/68 mm



Variant 4


2 cm double tongue and groove
Standard rabbeting
23/51 mm
alternatively 28/51 mm
Special rabbeting
max. 30/68 mm




Variant 5

19 x 38 mm separate tongue
Standard rabbeting
23/51 mm
alternatively 28/51 mm
Special rabbeting
max. 30/68 mm

Variant descriptions best wood GLULAM – CEILING 100–280 mm

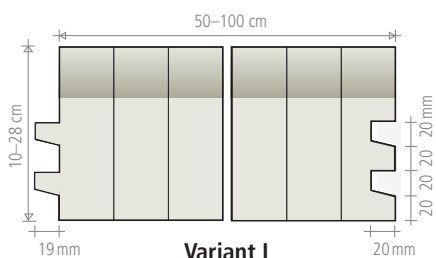

Variant I

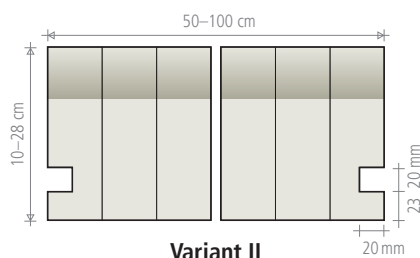


Variant II

Installation variants best wood GLULAM – CEILING separated 45–95 mm



Variant 0
Square edge



Variant 2
19 x 38 mm
Thickness: 60–95 mm




Variant 3
Standard rabbeting 23/51 mm
alternatively 28/51 mm
Thickness: 60–95 mm
Special rabbeting
up to max. 30/68 mm



1 cm double tongue and groove
Variant 6 Thickness: 45–59 mm
Variant 7 Thickness: 60–79 mm
Variant 8 Thickness: 80–99 mm

Installation variants planks for log houses/ceiling planks



1 cm double groove and tongue

Variant 7 Thickness: 60–79 mm

Variant 8 Thickness: 80–119 mm

Variant 9 Thickness: 120–159 mm

Variant 10 Thickness: 160–240 mm

GLULAM inlay boards / separate tongue

Inlay board for forming the ceiling section: Three-layer board SWP/2 S 3L according to EN 13353:2011, 22/100 mm in 5.00 m/piece

Inlay board for forming the ceiling section: Three-layer board SWP/2 S 3L according to EN 13353:2011, 27/100 mm in 5.00 m/piece


Separate tongue: spruce, 19/38 mm in 3.50 m/piece

Installation variants best wood CLT – CEILING


Installation variants best wood CLT – CEILING 60–280 mm




Variant 0
Square edge




Variant 11
10 mm tongue and groove




Variant 12
9 x 30 mm separate tongue




Variant 13
Standard rabbeting 23/51 mm
alternatively 28/51 mm
Special rabbeting
with 60 mm max. 23/59 mm
from 80 mm max. 35/59 mm



Variant 14
10 mm tongue and groove
Standard rabbeting 23/51
Thickness: 80–280 mm
Special rabbeting
with 80 mm max. 27/59
from 90 mm max. 35/59




Variant 15
9 x 30 mm separate tongue
Standard rabbeting 23/51
Thickness: 100–280mm
Special rabbeting
max. 35/59




Variant 16
Shiplap edge (half
thickness/50 mm)
Thickness: 60–180 mm

Installation variants best wood CLT – CEILING XL


Installation variants best wood CLT – CEILING 60–360 mm




Variant 0
Square edge




Variant 11
10 mm tongue and groove



Variant 13
Standard rabbeting
23/51 mm
alternatively 28/51 mm
Special rabbeting
max. 35/70 mm




Variant 14
Standard rabbeting 23/51 mm
10 mm tongue and groove
Thickness: 80–360 mm
alternatively 28/51 mm
Thickness: 90–360 mm
Special rabbeting
max. 35/70 mm




Variant 16
Shiplap edge (half
thickness/50 mm)
Thickness: 60–360 mm

Installation variants best wood CLT – WALL XL


Installation variants best wood CLT – WALL 60–360 mm




Variant 0
Square edge



Variant 13
Standard rabbeting
23/51 mm
alternatively 28/51 mm
Special rabbeting
max. 35/70 mm



Variant 16
Shiplap edge
(half thickness/50 mm)
Thickness: 60–360 mm



Variant 17
Rebate threshold

CLT inlay boards / separate tongue


Inlay board for forming the ceiling section: Three-layer board SWP/2 S 3L according to EN 13353:2011, 22/100 mm in 5.00 m/piece

Inlay board for forming the ceiling section: Three-layer board SWP/2 S 3L according to EN 13353:2011, 27/100 mm in 5.00 m/piece

Separate tongue: Multiplex birch, 9/30 mm in 2.50 m/piece, chamfered on one side


Installation variants best wood CLT BOX

Installation variant best wood CLT BOX / CLT BOX – CEILING FS 220–490 mm

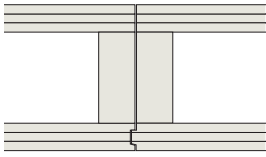


Variant 31

10 mm tongue and groove

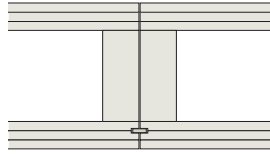


Variant 32

9 x 30 mm separate tongue

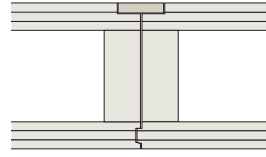

Variant 34


10 mm tongue and groove
Standard rabbeting 23/51 mm
alternatively 28/51 mm
Special rabbeting max. 35 x 59 mm

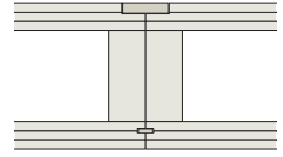

Variant 35


9 x 30 mm separate tongue
Standard rabbeting 23/51 mm
alternatively 28/51 mm
Special rabbeting max. 35 x 59 mm

Installation variant best wood CLT BOX – CEILING open 160–490 mm




Variant 0

Square edge




Variant 41

10 mm tongue and groove



Variant 42


9 x 30 mm separate tongue



Variant 43


Standard rabbeting 23/51 mm
alternatively 28/51 mm
Special rabbeting max. 35 x 51 mm

Installation variant best wood CLT BOX – ROOF 160–490 mm

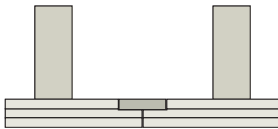

Variant 23

Standard rabbeting 23/51 mm

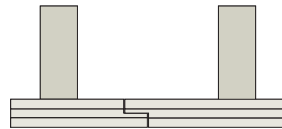

Variant 26

Shiplap edge (half thickness/50 mm)

CLT inlay boards / separate tongue

Inlay board for forming the ceiling section: Three-layer board SWP/2 S 3L according to EN 13353:2011, 22/100 mm in 5.00 m/piece

Inlay board for forming the ceiling section: Three-layer board SWP/2 S 3L according to EN 13353:2011, 27/100 mm in 5.00 m/piece

Separate tongue: Multiplex birch, 9/30 mm in 2.50 m/piece, chamfered on one side

Surface qualities best wood CLT, CLT BOX

Criteria	Local Industrial quality	Local visual industrial quality	Scandinavian visual quality	Local visual quality KNOT-FREE
1 Lamella width	≤ 240 mm	≤ 240 mm	≤ 160 mm	≤ 160 mm
2 Wood moisture	max. 15 % at delivery	max. 15 % at delivery	max. 15 % at delivery	max. 15 % at delivery
3 Wood species mixture	spruce/fir	spruce/fir	not permissible	not permissible
4 Bonding	occasional open joints up to max. 3 mm width permissible	occasional open joints up to max. 2 mm width permissible	occasional open joints up to max. 1 mm width permissible	occasional open joints up to max. 1 mm width permissible
5 Blue stain	permissible	slight discolouration permissible	not permissible	not permissible
6 Discolouration (brownness etc.)	permissible	slight discolouration permissible	not permissible	not permissible
7 Resin pockets	permissible	permissible	no clusters, max. 3 x 50 mm	no clusters, max. 3 x 50 mm
8 Bark ingrowths	permissible	permissible	not permissible	not permissible
9 Drying cracks	permissible	permissible	permissible ≤ 1.5 mm	permissible ≤ 1.5 mm
10 Core – pith	permissible	permissible	allowed if occasional	none
11 Insect infestation	burrows up to 2 mm allowed	not permissible	not permissible	not permissible
12 Branches – healthy	permissible	permissible	permissible	∅ max. 10 mm
13 Branches – black	permissible	permissible	∅ max. 10 mm	∅ max. 10 mm
14 Branches – hole	permissible	permissible up to max. 30 mm	not permissible	not permissible
15 Wane	max. 2 x 500 mm	not permissible	not permissible	not permissible
16 Surface	planed	sanded	sanded	sanded
17 Quality of the gluing of the narrow sides and of the end faces	occasional imperfections permissible	occasional imperfections permissible	occasional imperfections permissible	occasional imperfections permissible
18 Surface cosmetics with correction of knotholes, Lamello, strips, ...	permissible	permissible	permissible	permissible

Surface qualities best wood GLULAM, DUO, TRIO, CEILING PLANKS and PLANKS FOR LOG HOUSES

Criteria	Local Industrial quality	Local visual quality	Scandinavian visual quality	Local visual quality KNOT-FREE
1 Firm knots	permissible ^{2,3,4}	permissible ^{2,3,4}	permissible ^{2,3,4}	< 10 mm
2 Knots that have fallen out	permissible ^{2,3,4}	∅ ≤ 35 mm are permissible ^{2,3,4} ∅ > 35 mm are not permissible ^{2,3,4}	∅ ≤ 35 mm are permissible ^{2,3,4} ∅ > 35 mm are not permissible ^{2,3,4}	none
3 Resin pockets	permissible ³	permissible ³	permissible up to a width of 5 mm ³	permissible ³
4 Knots and imperfections improved by means of knot hole plugs or "ships"	permissible ³	permissible ³	permissible ³	permissible ³
5 Knots, edges, and resin pockets improved using filler compounds	permissible ^{3,6}	permissible ^{3,6}	permissible ^{3,6}	permissible ^{3,6}
6 Insect infestation	burrows up to 2 mm are permissible ³	burrows up to 2 mm are permissible ³	not permissible	not permissible
7 Pith	permissible ³	permissible ³	permissible if occasional	none
8 Width of shrinkage cracks ^{3,5,7}	no limit	up to 5 mm	up to 4 mm	up to 5 mm
9 Discolouration as a result of blue stain and red/brown nail-resistant streaks	permissible	permissible if occasional	permissible if occasional	permissible if occasional
10 Mould infestation	not permissible ⁵	not permissible ⁵	not permissible ⁵	not permissible ⁵
11 Soiling	not permissible ⁵	not permissible ⁵	not permissible ⁵	not permissible ⁵
12 Wane	up to 10 mm depth and 10 mm width ³	not permissible	not permissible	not permissible
13 Lamellae partially not planed	isolated lamellae, depth up to 10 mm permissible	not permissible	not permissible	not permissible
14 Processing of the surface	planed and chamfered, plane knocks up to 1 mm in depth permissible, places not planed up to 2 mm permissible	planed and chamfered, plane knocks up to 1 mm in depth permissible	planed and chamfered, plane knocks up to 0.5 mm in depth permissible	sanded

¹ Deviations from the limits defined below in the lines 2,3,6–9,13 are to be tolerated in the following scope: Maximum three deviations/m² visible surface for the visual quality, maximum one deviation/m² visible surface for the Scandinavian quality.

² Permissible knot size according to DIN 4074.

³ No limit on the number.

⁴ Measurement of the knot diameter analogous to the measurement of the diameters of individual knots with scantlings according to DIN 4074-1: 2021-06

⁵ As-delivered condition

⁶ Filler compounds that can be painted over are to be explicitly requested.

⁷ Regardless of the surface quality, the crack depth in elements not subjected to transverse stress may be up to 1/6 of the element width, and up to 1/8 of the element width of each side.

Solid structural timber (KVH®)

Sort keys

Technical regulation: DIN EN 15497:2014 Sort criterion	Demands on solid structural timber for industrial purposes (KVH NSI)	Comments
Wane	measured diagonally a max. of 10 % minor cross section side	increased demands compared to DIN 4074-1
Knots	A max. 2/5	equal to sorting class S 10
Condition of knots	not exceeding 70 mm	acc. to DIN 4074-1 permitted sorting characteristic for KVH
Annual ring width	up to 6 mm	equal to sorting class S 10 according to DIN 4074-1
Slope of the grain	up to 120 mm/m	equal to sorting class S 10 according to DIN 4074-1
Radial shrinkage cracks (= seasoning cracks)	permissible	increased demands compared to DIN 4074-1 for KVH-SI
Lightning/frost cracks, ring peeling	not permissible	Equal to sorting class S10 according to DIN 4074-1
Discolouration: Blue stain	permissible	increased demands compared to DIN 4074-1 for KVH-SI
Nail-holding brown and red stripes	up to 2/5 of the cross section of the surface are permitted	increased demands compared to DIN 4074-1 for KVH-SI
Red and white rot	not permissible	
Compression wood	up to 2/5 of the cross section or the surface are permitted	equal to sorting class S 10 according to DIN 4074-1
Insect damages	burrows up to 2 mm Ø of fresh timber insects are permitted	increased demands compared to DIN 4074-1 for KVH-SI
Mistletoe infestation	not permissible	equal to sorting class S 10 according to DIN 4074-1
Bending (longitudinal bending, twist)	Split-heart cutting max. 8 mm/2 m	increased demands compared to DIN 4074-1 for split-heart cut timber
Wood moisture	max. 18 %	additional sorting characteristic for KVH
Cutting class	split-heart	additional sorting characteristic for KVH
Dimensional stability of the cross section	± 1 mm	additional sorting characteristic for KVH
Bark pocket		additional sorting characteristic for KVH-SI
Resin pockets		additional sorting characteristic for KVH-SI
Surface condition	planed and chamfered	additional sorting characteristic for KVH
Conditioning of the ends	rectangular cross-cut	additional sorting characteristic for KVH

Basic information on best wood SCHNEIDER® surface qualities

Elements are manufactured in different qualities and thus fulfil differing visual and design requirements. The desired surface qualities can be found in the above table. Deviations from this information are to be separately contractually agreed.

Transportation and installation; constructional instructions

All elements, with the exception of CLT XL, are packed in wrapping foil at the factory, so they are protected during loading, transportation, and brief intermediate storage. The transport packing only provides short-term protection and should be removed as soon as possible due to the danger of condensation formation leading to blue stain and mould growth. The elements are then to be protected with suitable coverings against moisture penetration, direct sunlight and dirt.

The outer layers of the elements, in particular, absorb moisture in the state of construction. This building moisture must be gradually shifted to the equilibrium moisture content of later use. Careful heating and airing, and the consequent slow reduction of the relative air humidity and corresponding wood moisture, is conducive to this.

Depending on the environmental conditions, shrinkage cracks can occur on the surfaces of the elements – including along the glue line – because of the wood's natural swelling and shrinking behaviour. In elements without systemic transverse stress such shrinkage cracks can be tolerated up to a depth of 1/6 of the element width (each side), in elements with planned transverse stress up to 1/8 of the element width (per side). The tendency towards crack formation grows where there is direct weathering and strongly changing climatic stresses. At the planning stage, protective measures should already also be envisaged for the state of construction. These include, in particular, covers and unimpeded water drainage. It is recommended that coatings only be applied once the equilibrium moisture content has been achieved. Glue joints in elements made of larch sometimes tend to open up when exposed to direct weathering, because of intracellular substances. We therefore recommend that glulam made from larch be built exclusively into the use classes I and II.

The wooden elements must not be exposed to the external climate or extreme climate conditions (e.g. excessive use of construction dryers or direct moisture impact) at any time. Due to the natural and thus unavoidable shrinkage and swelling characteristics of timber, small cracks may occur depending upon the room climate. The shrinkage and swelling characteristics of the ceiling must always be considered for all detailed construction forms (when attached to walls etc.). Wood can be expected to acclimatize at an equilibrium moisture content of 9 % in closed and normal air-conditioned rooms.

Dimensioning aid best wood **GLULAM – CEILING**



Perm. loads* [kN/m ²]	Live loads [kN/m ²]	Span length of single span beams [m]						Span lengths of double span beams [m]					
		3.00	4.00	5.00	6.00	7.00	8.00	3.00	4.00	5.00	6.00	7.00	8.00
1.00	1.00						200		100				
	1.50		100						100				
	2.00	100		140	180	200	220	100	100	140	180	200	200
	3.00												
	5.00	100	120	160	200	220	260	100	120				220
2.50	1.00	100					240	100					180
	1.50		120	160	180	220	260		120	160	160	160	200
	2.00	100						100				180	220
	3.00				200	240	280				180	200	220
	5.00		140	180	200	240	280				180	200	220
4.00	1.00												200
	1.50	100			200	240	280	100	140	140	160	180	220
	2.00		140	180								200	240
	3.00				220	260	-				180	200	240
	5.00	120											

* The dead weight of the best wood GLULAM board has already been taken into account.

These tables are only intended for pre-dimensioning and are no substitute for structural analysis.

Fire resistance: R60 R90

Example for a GLULAM ceiling in a detached house:

Design values:

Permanent load $g = 1.0 \text{ kN/m}^2$

Live load $q = 2.0 \text{ kN/m}^2$

Span length $l = 5.0 \text{ m}$

Result:

Demanded thickness of ceiling = 140 mm

Charring rate = R90

This pre-measuring is no substitute for structural verification.

The following parameters and certificates were taken into account in the calculations:

Certificate of load-bearing capacity according to DIN EN 1995-1-1:2010-12 with NA:2013-08

Certificate of structural fire design according to DIN EN 1995-1-2:2010-12 with NA:2010-12

Application class 1

Load duration class of the intermittent load: medium

$\Psi_2 = 0.3$; $k_{\text{def}} = 0.60$; GL24h

Ultimate limit state; certificate of bending stress; certificate of (rolling) shear stress

Serviceability limit state; initial deflection $\leq l/300$; final deflection $\leq l/200$; total deflection $\leq l/300$

Verification of vibration: Width of the ceiling panel $b = 1.2 \cdot \text{span length}$; additional rigidity EI_v from 5 cm screed slab; modal damping ratio $\zeta = 0.03$;

limitation of acceleration $a \leq 0.4 \text{ m/s}^2$

Dimensioning aid

best wood CLT – CEILING | CEILING XL



Perm. loads* [kN/m ²]	Live loads [kN/m ²]	Span length of single span beams [m]						Span lengths of double span beams [m]						
		3.00	4.00	5.00	6.00	7.00	8.00	3.00	4.00	5.00	6.00	7.00	8.00	
1.00	1.00	80						60						
	1.50		100						90					
	2.00	80		140		200	200	220						
	3.00		110					220	240					
	5.00	100	130	160	220		260	80	110			220	220	
2.50	1.00													200
	1.50	90												
	2.00		130	160	200	220	260	80	130	160	170	170		220
	3.00											200		
	5.00	100	140	180	220	240	280	90			180	220	240	
4.00	1.00													
	1.50	100												
	2.00		140	180	220	240		90	140	150	160	200		220
	3.00										170			
	5.00	110	160	200		260				160	200	220		240

* The dead weight of the best wood CLT panel has already been taken into account

These tables are only intended for pre-dimensioning and are no substitute for structural analysis.

Fire resistance:	R0	R30	R60	R90

Example for a CLT ceiling in a detached house:

Design values:

Permanent load $g = 1.0 \text{ kN/m}^2$
 Live load $q = 2.0 \text{ kN/m}^2$
 Span length $l = 5.0 \text{ m}$

Result:

Demanded thickness of ceiling = 140 mm
 Charring rate = R60

This pre-measuring is no substitute for structural verification.

The following parameters and certificates were taken into account in the calculations:

Certificate of load-bearing capacity according to DIN EN 1995-1-1:2010-12 with NA:2013-08

Certificate of structural fire design according to DIN EN 1995-1-2:2010-12 with NA:2010-12

Application class 1

Load duration class of the intermittent load: medium

$\Psi_2 = 0.3$; $k_{ser} = 0.60$; C24

Ultimate limit state; certificate of bending stress; certificate of (rolling) shear stress

Serviceability limit state; initial deflection $\leq l/300$; final deflection $\leq l/200$; total deflection $\leq l/300$

Verification of vibration: Width of the ceiling panel $b = 1.2 \cdot \text{span length}$; additional rigidity EI_{slab} from 5 cm screed slab; modal damping ratio $\zeta = 0.03$; limitation of acceleration $a \leq 0.4 \text{ m/s}^2$

Dimensioning aid best wood CLT BOX

(lower CLT panel 60 mm)



Perm. loads* [kN/m ²]	Live loads [kN/m ²]	Span length of single span beams [m]						Span lengths of double span beams [m]								
		6.00	7.00	8.00	9.00	10.00	11.00	3.00	4.00	5.00	6.00	7.00	8.00			
1.00	1.00	220/80	220/80	240/80	260/80	300/80	340/80	220/80	220/80	220/80	220/80	240/80	240/100			
	1.50				280/80	320/80										
	2.00				260/80	300/80								340/80	380/80	
	3.00				260/80	300/80								340/80	380/80	420/100
	5.00				260/80	300/80								340/80	380/80	420/100
2.50	1.00	220/80	240/80	280/80	320/80	360/80	400/80	220/80	220/80	220/80	220/80	220/80	220/80			
	1.50				360/100	400/120										
	2.00				260/80	300/80	340/80							380/80	420/80	420/100
	3.00				260/80	300/80	340/80							380/80	420/100	420/100
	5.00				240/80	280/80	320/80							360/100	420/80	460/100
4.00	1.00	240/80	280/80	320/80	360/80	420/80	460/100	220/80	220/80	220/80	220/80	220/80	240/100			
	1.50				360/120	420/80										
	2.00				380/80	460/120	480/100									
	3.00				280/100	340/80	420/120							480/100		
	5.00				260/80	300/80	340/80							400/80	440/100	-

* The dead weight of the best wood CLT BOX has already been taken into account

These tables are only intended for pre-dimensioning and are no substitute for structural analysis.

R60

Fire resistance:



Example for a CLT BOX in a multi-family house:

Design values:

Permanent load	$g = 2.50 \text{ kN/m}^2$	Result: 340/80	Thickness of ceiling	= 340 mm
Live load	$q = 3.00 \text{ kN/m}^2$		Rib width	= 80 mm
Span length	$l = 9.00 \text{ m}$		Charring rate	= R60

The following parameters and certificates were taken into account in the calculations:

Certificate of load-bearing capacity according to DIN EN 1995-1-1:2010-12 with NA:2013-08

Certificate of structural fire design according to DIN EN 1995-1-2:2010-12 with NA:2010-12

Upper CLT panel: 60 mm; lower CLT panel: 60 mm

Application class 1

Load duration class of the intermittent load: medium

$\Psi_2 = 0.3$; $k_{ser} = 0.60$; C24

Ultimate limit state: Certificate of bending stress, certificate of (rolling) shear stress

Serviceability limit state: Initial deflection $\leq l/300$; final deflection $\leq l/200$; total deflection $\leq l/300$

Verification of vibration: Width of the ceiling panel $b = 1.2 \cdot l$; additional rigidity EI_{xy} from 5 cm screed slab; modal damping ratio $\zeta = 0.03$;

limitation of acceleration $a \leq 0.4 \text{ m/s}^2$

Dimensioning aid best wood CLT BOX – CEILING FS

(lower CLT panel 60 mm)



Perm. loads* [kN/m ²]	Live loads [kN/m ²]	Span length of single span beams [m]						Span lengths of double span beams [m]												
		6.00	7.00	8.00	9.00	10.00	11.00	3.00	4.00	5.00	6.00	7.00	8.00							
1.00	1.00	240/80	300/80	360/80	340/80	320/80	340/80	220/80	220/80	220/80	240/80	300/80	360/80							
	1.50						280/80							360/80						
	2.00						300/80							340/80	380/80					
	3.00						340/100							380/100	420/120					
	5.00						240/100							280/100	300/100	360/100				
2.50	1.00	280/80	260/80	300/80	340/80	380/80	420/80	220/80	220/80	220/80	280/80	220/100	220/100							
	1.50						420/100						220/120							
	2.00						440/80						240/120							
	3.00						400/80						440/80	220/120	240/120					
	5.00						280/100						280/100	320/100	360/100	420/100	460/100	220/100	220/120	280/100
4.00	1.00	240/100	280/100	320/100	360/120	420/80	460/100	220/80	220/80	240/100	220/100	220/120	240/120							
	1.50						460/120													
	2.00						340/80						380/80	420/100	480/100					
	3.00						300/100						340/100	380/100	440/100	480/100	220/100	220/120	240/120	280/120
	5.00						260/100						340/120	400/100	440/120	-	240/120	260/120	300/120	340/120

* The dead weight of the best wood CLT BOX – CEILING FS and the chippings in the rafter has already been taken into account.

These tables are only intended for pre-dimensioning and are no substitute for structural analysis.

R60

Fire resistance:



Example for a CLT BOX– CEILING FS in a multi-family house:

Design values:

Permanent load	$g = 2.50 \text{ kN/m}^2$	Result: 340/80	Thickness of ceiling	= 340 mm
Live load	$q = 3.00 \text{ kN/m}^2$		Rib width	= 80 mm
Span length	$l = 9.00 \text{ m}$		Charring rate	= R60

The following parameters and certificates were taken into account in the calculations for the dimensioning aid best wood CLT BOX – CEILING FS:

Element width: 1.25 m

Verification with 40 kg/m² chippings in the CLT BOX – CEILING FS

Certificate of load-bearing capacity according to DIN EN 1995-1-1:2010-12 with NA:2013-08

Certificate of structural fire design according to DIN EN 1995-1-2:2010-12 with NA:2010-12

Upper CLT panel: 60 mm; lower CLT panel: 60 mm

Application class 1

Load duration class of the intermittent load: medium

$\Psi_2 = 0.3$; $k_{ser} = 0.60$; C24

Ultimate limit state: Certificate of bending stress, certificate of (rolling) shear stress

Serviceability limit state: Initial deflection $\leq l/300$; final deflection $\leq l/200$; total deflection $\leq l/300$

Verification of vibration: Width of the ceiling panel $b = 1.2 \cdot l$; additional rigidity EI_{ky} from 5 cm screed slab; modal damping ratio $\zeta = 0.03$;

limitation of acceleration $a \leq 0.4 \text{ m/s}^2$

Dimensioning aid best wood CLT BOX – CEILING FS

(lower CLT panel 90 mm)



Perm. loads* [kN/m ²]	Live loads [kN/m ²]	Span length of single span beams [m]						Span lengths of double span beams [m]							
		6.00	7.00	8.00	9.00	10.00	11.00	3.00	4.00	5.00	6.00	7.00	8.00		
1.00	1.00	250/80	310/80	310/120	290/80	310/80	350/80	250/80	250/80	250/80	250/80	310/80	310/120		
	1.50					330/80									
	2.00					370/80									
	3.00					310/80								350/80	390/80
	5.00					350/100								390/100	430/100
2.50	1.00	290/80	250/80	290/80	330/80	370/80	370/80	250/80	250/80	250/80	290/80	250/100	250/100		
	1.50					410/80									
	2.00					410/120									
	3.00					330/120								390/80	430/80
	5.00					270/80								310/80	350/80
4.00	1.00	250/80	290/80	330/80	370/80	410/100	410/100	250/80	250/80	250/100	250/100	250/120	250/120		
	1.50					470/80									
	2.00					430/80									
	3.00					370/100								430/100	490/100
	5.00					250/100								290/100	330/100

* The dead weight of the best wood CLT BOX – CEILING FS and the chippings in the rafter has already been taken into account.

These tables are only intended for pre-dimensioning and are no substitute for structural analysis.

R90

Fire resistance:



Example for a CLT BOX– CEILING FS in a multi-family house:

Design values:

Permanent load	$g = 2.50 \text{ kN/m}^2$	Result: 350/80	Thickness of ceiling	= 350 mm
Live load	$q = 3.00 \text{ kN/m}^2$		Rib width	= 80 mm
Span length	$l = 9.00 \text{ m}$		Charring rate	= R90

The following parameters and certificates were taken into account in the calculations for the dimensioning aid best wood CLT BOX – CEILING FS:

Element width: 1.25 m

Verification with 40 kg/m² chippings in the CLT BOX – CEILING FS

Certificate of load-bearing capacity according to DIN EN 1995-1-1:2010-12 with NA:2013-08

Certificate of structural fire design according to DIN EN 1995-1-2:2010-12 with NA:2010-12

Upper CLT panel: 60 mm; lower CLT panel: 90 mm

Application class 1

Load duration class of the intermittent load: medium

$\Psi_2 = 0.3$; $k_{ser} = 0.60$; C24

Ultimate limit state: Certificate of bending stress, certificate of (rolling) shear stress

Serviceability limit state: Initial deflection $\leq l/300$; final deflection $\leq l/200$; total deflection $\leq l/300$

Verification of vibration: Width of the ceiling panel $b = 1.2 \cdot l$; additional rigidity $EI_{s,0}$ from 5 cm screed slab; modal damping ratio $\zeta = 0.03$;

limitation of acceleration $a \leq 0.4 \text{ m/s}^2$



About best wood SCHNEIDER®

The Schneider company group is an internationally operating family-run company with headquarters in Eberhardzell. At the highest technical level, we produce all supporting wood components and wood fiber insulation boards for modern wood and passive house construction and pellets for ecological heating with more than 550 employees.

Good for nature, good for us all. Tested & certified.

From round wood to finished product including energy requirement, we implement everything in a closed raw material cycle in our production facilities in Southern Germany. best wood SCHNEIDER realises energy-efficient production in accordance with DIN ISO 50001. The material wood is utilised 100 % to the last chip.

We are certified by independent bodies such as natureplus and PEFC. And for the best quality with "Zero Waste", short distances, and just in time on your construction site, of course.



Eberhardzell site

best wood SCHNEIDER® GmbH
 Kappel 28 | D-88436 Eberhardzell
 Phone +49 (0)7355 9320-0
 Fax +49 (0)7355 9320-300

Subsidiary Meßkirch

best wood SCHNEIDER® GmbH
 Industriepark 16 | D-88605 Meßkirch
 Phone +49 (0)7355 9320-8000
 Fax +49 (0)7355 9320-300

Subsidiary Switzerland

best wood SCHNEIDER® GmbH
 Weinfelderstrasse 29A | CH-8560 Märstetten
 Phone +41 (0)71 918 79 79
 Fax +41 (0)71 918 79 78

info@schneider-holz.com
www.schneider-holz.com